



Arichitectural Lighting
Comprehensive Services
Provider

Dongguang Quicken Technology Co., Ltd

Room 801, Unit 2, No. 248, Huanshi West Road, Tangxia Town, Dongguan

City, Guangdong Province, China

Website: www.quickentech.com

Email: lisa@quickentech.com

Contact: Lisa

Phone: +86-15899614966



Who is Quicken tech?

Organization-Sales-Marketing/Customized Product Design Company

We are designing brighter tomorrow by combining in lighting solutions.

We produce the most suitable products with our success using superior engineering technology by manufacture design special to the lighting needs of our customers.

Since our founding in 2023, we've dedicated ourselves to designing and manufacturing cutting-edge LED lighting products that make a difference.

Our mission is to illuminate spaces, enhance environments, and inspire sustainability. We believe that lighting should not only be functional but also beautiful, reliable, and eco-friendly. That's why we use only the highest-quality materials and latest technologies to craft our LED lighting solutions.

At Quicken tech , we're driven by a team of experts who share a common goal: to deliver exceptional customer experiences and lighting solutions that exceed expectations. Whether you're a homeowner, architect, or business owner, we're here to help you shine.



Explore our website to discover our range of LED lighting products, from the categories.

Learn about our commitment to sustainability, quality control,and customer satisfaction.

Join us in our pursuit of brighter, more sustainable tomorrow

Optic Design

In accordance with projected lighting calculations, product design and production are carried out at a level that ensures energy saving without sacrificing quality according to EN60598 and ISO 9001 standards. This is done by using Solid-works or other design programs in accordance with the ceiling and installation where light is used

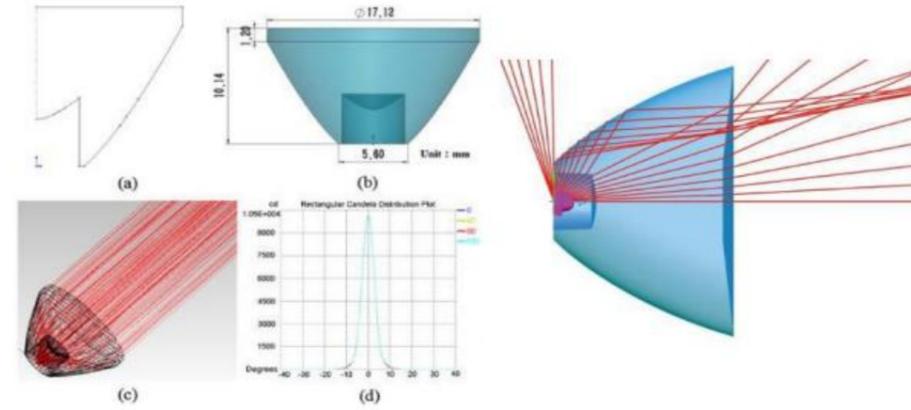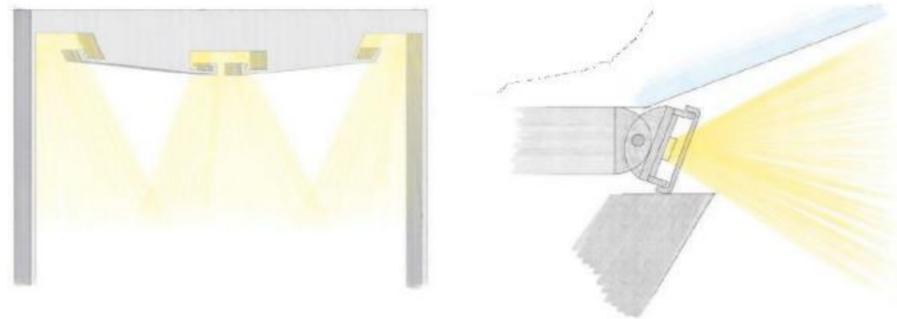



Product Design

According to project lighting calculations, the product is designed and manufactured at a level that saves energy without sacrificing quality in accordance with EN60598 and ISO 9001 standards by using Solid-works or other design programs in place of the ceiling and installation where light is used.

Lighting engineering





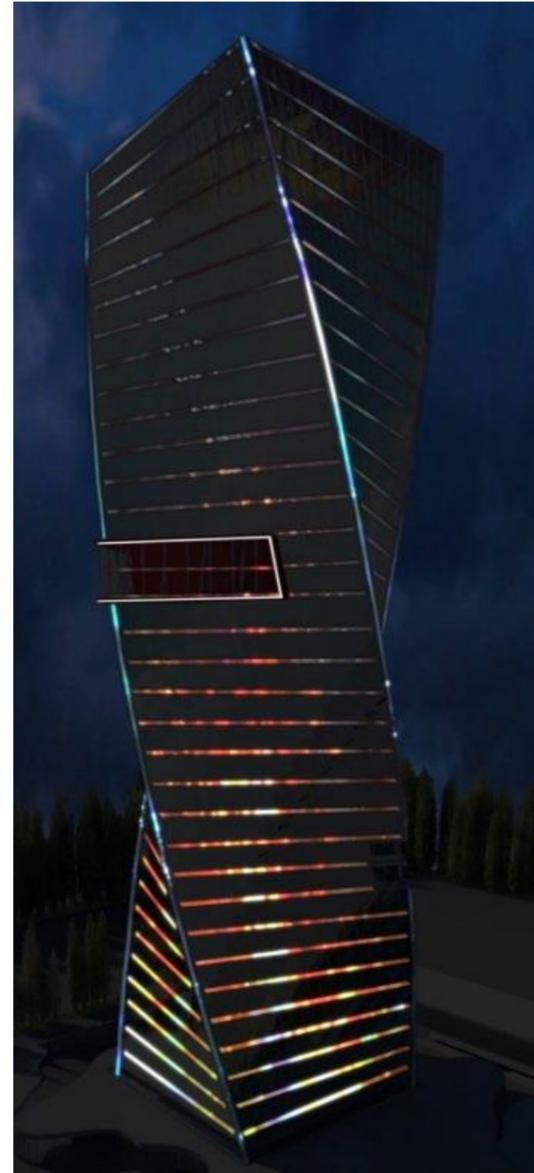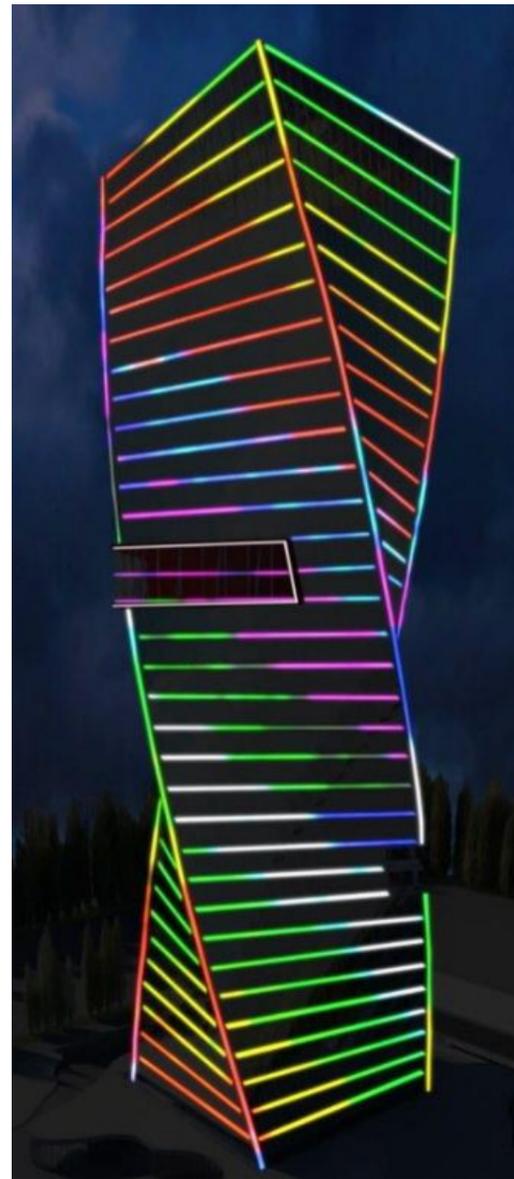

Contents

Flood light series



Ingound light series



Outline light series



Underwater light series




Wall light series



Street light series



LED flood light series



QT11001

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x5W	CREE	Single	IK05	350lm	12/24 VDC/220-240VAC	3°/8°
3x2W	OSRAM/CREE	Single	IK05	330lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°*60°/20°*55°
1x6W	CREE COB	Single	IK05	600lm	12/24 VDC/220-240VAC	18°/24/38°/60°
3x3W	OSRAM	RGB 3in 1	IK05	128lm	12/24 VDC	25°/40°/60°
3x4W	OSRAM	RGBW 4in1	IK05	168lm	12/24 VDC	25°/40°/60°

QT11002

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x10W	CREE	Single	IK05	750lm	12/24 VDC/220-240VAC	3°/8°
4x3W	OSRAM/CREE	Single	IK05	780lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°*60°/20°*55°
1x13W	CREE COB	Single	IK05	1310lm	24 VDC/220-240VAC	18°/24/38°/60°
4x3W	OSRAM	RGB 3in 1	IK05	168lm	12/24 VDC/220-240VAC	25°/40°/60°
4x3.5W	OSRAM	RGBW 4in1	IK05	224lm	12/24 VDC/220-240VAC	25°/40°/60°


QT11003

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
3x5W	CREE	Single	IK05	1140lm	12/24 VDC/220-240VAC	3°/8°
6x3W	OSRAM/CREE	Single	IK05	1200lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°*60°/20°*55°
1x20W	CREE COB	Single	IK05	2200lm	24 VDC/220-240VAC	18°/24/38°/60°
6x2.5W	OSRAM	RGB 3in 1	IK05	360lm	12/24 VDC/220-240VAC	25°/40°/60°
6x3.5W	OSRAM	RGBW 4in1	IK05	480lm	12/24 VDC/220-240VAC	25°/40°/60°

QT11004

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6x7W	CREE	Single	IK05	1140lm	12/24 VDC/220-240VAC	3°/8°
12x3.5W	OSRAM/CREE	Single	IK05	1200lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°*60°/20°*55°
1x40W	CREE COB	Single	IK05	2200lm	24 VDC/220-240VAC	18°/24/38°/60°
12x2.5W	OSRAM	RGB 3in 1	IK05	360lm	12/24 VDC/220-240VAC	25°/40°/60°
12x3.5W	OSRAM	RGBW 4in1	IK05	480lm	12/24 VDC/220-240VAC	25°/40°/60°

LED flood light series

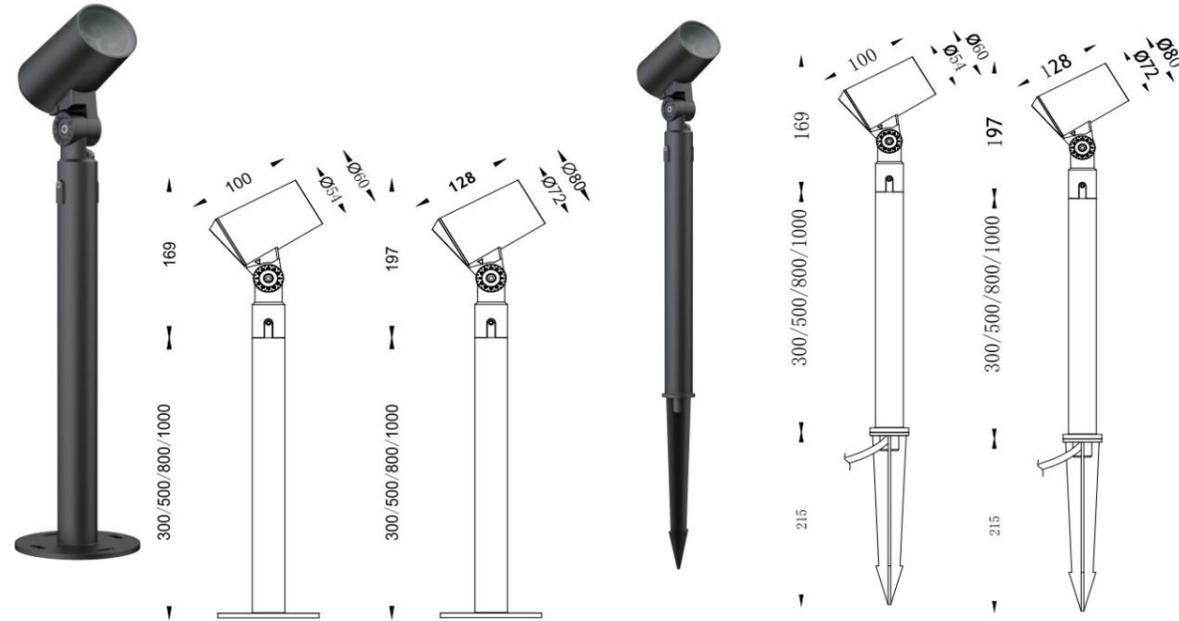

QT11001

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x5W	CREE	Single	IK05	350lm	12/24 VDC/220-240VAC	3°/8°
3x2W	OSRAM/CREE	Single	IK05	330lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°*60°/20°55°
1x6W	CREE COB	Single	IK05	600lm	12/24 VDC/220-240VAC	18°/24°/38°/60°
3x3W	OSRAM	RGB 3in 1	IK05	128lm	12/24 VDC	25°/40°/60°
3x4W	OSRAM	RGBW 4in1	IK05	168lm	12/24 VDC	25°/40°/60°

QT11002


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x10W	CREE	Single	IK05	750lm	12/24 VDC/220-240VAC	3°/8°
4x3W	OSRAM/CREE	Single	IK05	780lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°*60°/20°55°
1x13W	CREE COB	Single	IK05	1310lm	24 VDC/220-240VAC	18°/24°/38°/60°
4x3W	OSRAM	RGB 3in 1	IK05	168lm	12/24 VDC/220-240VAC	25°/40°/60°
4x3.5W	OSRAM	RGBW 4in1	IK05	224lm	12/24 VDC/220-240VAC	25°/40°/60°

QT11003


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
3x5W	CREE	Single	IK05	1140lm	12/24 VDC/220-240VAC	3°/8°
6x3W	OSRAM/CREE	Single	IK05	1200lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°*60°/20°55°
1x20W	CREE COB	Single	IK05	2200lm	24 VDC/220-240VAC	18°/24°/38°/60°
6x2.5W	OSRAM	RGB 3in 1	IK05	360lm	12/24 VDC/220-240VAC	25°/40°/60°
6x3.5W	OSRAM	RGBW 4in1	IK05	480lm	12/24 VDC/220-240VAC	25°/40°/60°

QT11004

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6x7W	CREE	Single	IK05	1140lm	12/24 VDC/220-240VAC	3°/8°
12x3.5W	OSRAM/CREE	Single	IK05	1200lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°*60°/20°55°
1x40W	CREE COB	Single	IK05	2200lm	24 VDC/220-240VAC	18°/24°/38°/60°
12x2.5W	OSRAM	RGB 3in 1	IK05	360lm	12/24 VDC/220-240VAC	25°/40°/60°
12x3.5W	OSRAM	RGBW 4in1	IK05	480lm	12/24 VDC/220-240VAC	25°/40°/60°

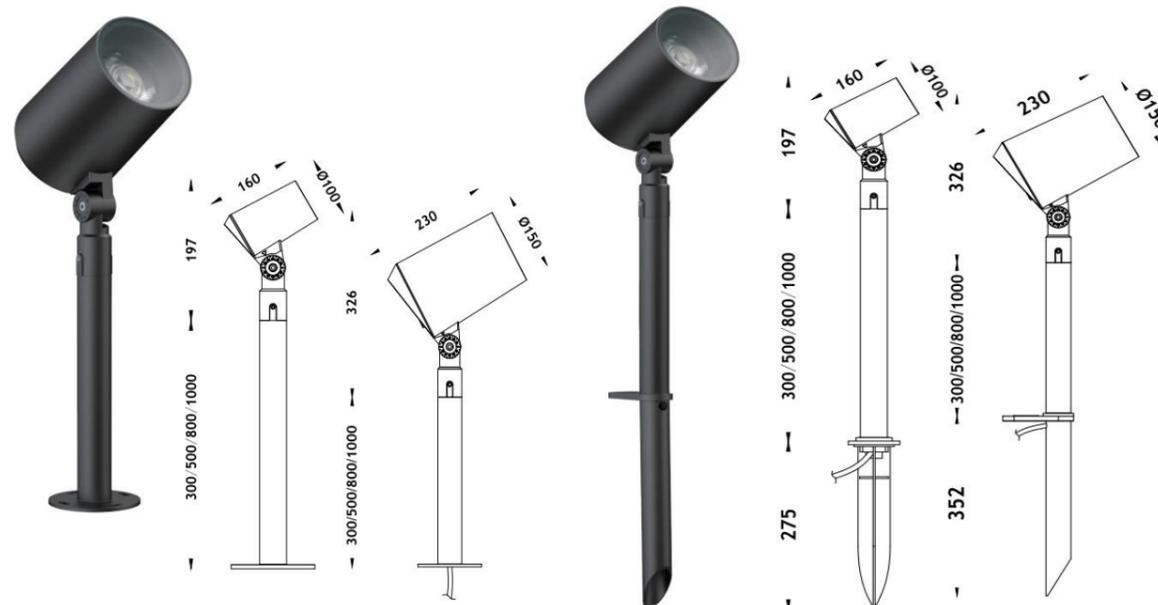

LED zoomable flood light series



QT11005



Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x6W	CREE COB	Single	IK05	380lm	12/24 VDC/220-240VAC	15-60°

QT11006




Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x12W	CREE COB	Single	IK05	940lm	24 VDC/220-240VAC	15-60°

QT11007



Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x20W	CREE COB	Single	IK05	1420lm	24 VDC/220-240VAC	15-60°

QT11008

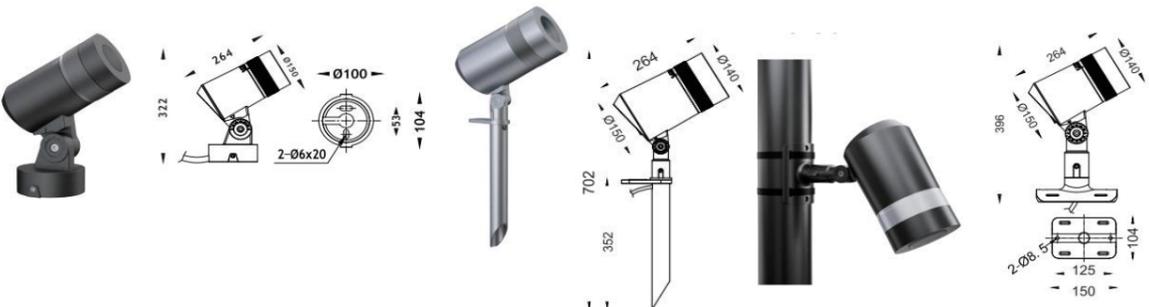

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x40W	CREE COB	Single	IK05	2500lm	24 VDC/220-240VAC	15-60°

LED flood light series










QT11009/10/11



QT11012/13/14





QT11015

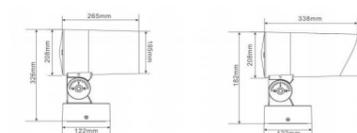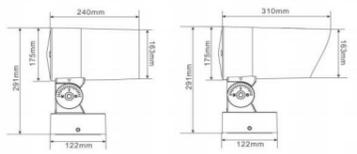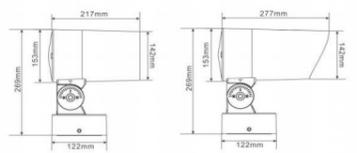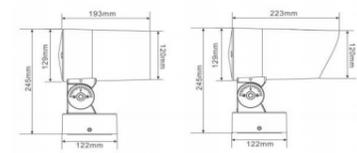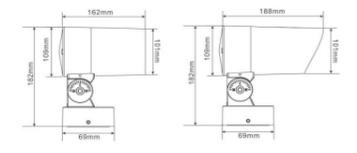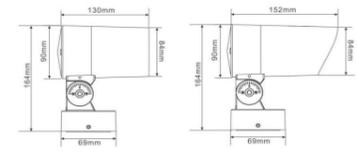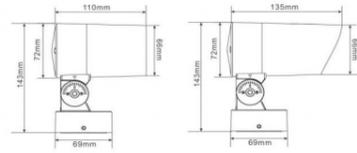

Product model	QT11009	QT11010	QT11011
Product power	9W-9/12W	15/18W-18/24W	15/24W-24/36W
Luminous color	Single CCT-RGB/RGBW	Single CCT-RGB/RGBW	Single CCT-RGB/RGBW
LED Qty	1/3PCS	3/6PCS	3/8PCS
Dimension	Ø66*H143MM	Ø84*H164MM	Ø101*H182MM
LED Light Source	OSRAM / CREE		
Beam Angle	3° / 5° / 10°/15° /30°/ 45° /60° / 90°		
CRI	Ra 80		
Luminous efficiency	100-130LM/W		
Power factor	>0.9		
Working voltage	DC24V/ AC85-265V		
Frequency range	50-60Hz		
Drive Electrical	Mean well / DOEN		
Control mode	ON-OFF / DMX512 / DALI		
Working temperature	-40~+50°C		
Safety level	I - III		
Lamp material	Die-casting aluminum+tempered glass		
IP Grade	IP65		

Product model	QT11012	QT11013	QT11014
Product power	24/36W-36/48W	36/48W-48/60W	60/72W-60/80W
Luminous color	Single CCT-RGB/RGBW	Single CCT-RGB/RGBW	Single CCT-RGB/RGBW
LED Qty	5/12PCS	8/18PCS	10/24PCS
Dimension	Ø120*H245MM	Ø142*H269MM	Ø163*H291MM
LED Light Source	OSRAM / CREE		
Beam Angle	3° / 5° / 10°/15° /30°/ 45° /60° / 90°		
CRI	Ra 80		
Luminous efficiency	100-130LM/W		
Power factor	>0.9		
Working voltage	DC24V/ AC85-265V		
Frequency range	50-60Hz		
Drive Electrical	Mean well / DOEN		
Control mode	ON-OFF / DMX512 / DALI		
Working temperature	-40~+50°C		
Safety level	I - III		
Lamp material	Die-casting aluminum+tempered glass		
IP Grade	IP65		


Power	LED	CCT	Input Voltage	Beam Angle
72/96W	16PCS OSRAM / CREE	Single	DC24V/ AC85-265V	3° / 5° / 10°/15° /30°/ 45° /60° / 90°
100/120W	36PCS OSRAM / CREE	RGB/RGBW		

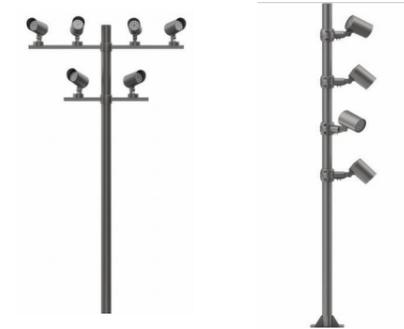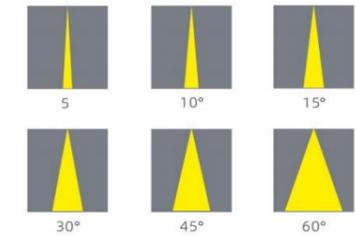


LED flood light series



QT11016/17/18

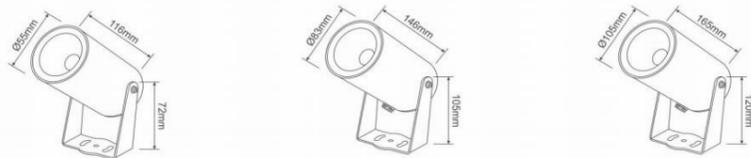

QT11019/20/21/22

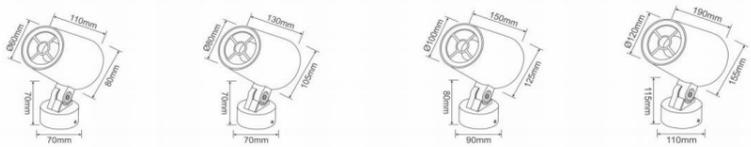

Product model	QT11016	QT11017	QT11018
Product power	5W/7W-15W	20W-30W	30W-40W
Luminous color	Single CCT-RGB/RGBW	Single CCT-RGB/RGBW	Single CCT-RGB/RGBW
LED Qty	1PC	1PC	1PC
Dimension	Ø55*H72MM	Ø83*H105MM	Ø105*H120MM
LED Light Source	OSRAM / CREE		
Beam Angle	24°		
CRI	Ra 80		
Luminous efficiency	100-130LM/W		
Power factor	>0.9		
Working voltage	DC24V/ AC85-265V		
Frequency range	50-60Hz		
Drive Electrical	Mean well / DOEN		
Control mode	ON-OFF / DMX512 / DALI		
Working temperature	-40~+50°C		
Safety level	I - III		
Lamp material	Die-casting aluminum+tempered glass		
IP Grade	IP65		



24°



15°



30°



45°



Product model	QT11019	QT11020	QT11021	QT11022
Product power	7W/10W-12W	12W/15W-20W	20/25W-30W	30W/35W/45W
Luminous color	Single CCT-RGB/RGBW	Single CCT-RGB/RGBW	Single CCT-RGB/RGBW	Single CCT-RGB/RGBW
LED Qty	1PC	1PC	1PC	1PC
Dimension	Ø60*110*H70MM	Ø80*130*H70MM	Ø100*150*H80MM	Ø120*190*H115MM
LED Light Source	OSRAM / CREE			
Beam Angle	15° / 30° / 45°			
CRI	Ra 80			
Luminous efficiency	100-130LM/W			
Power factor	>0.9			
Working voltage	DC24V/ AC85-265V			
Frequency range	50-60Hz			
Drive Electrical	Mean well / DOEN			
Control mode	ON-OFF / DMX512 / DALI			
Working temperature	-40~+50°C			
Safety level	I - III			
Lamp material	Die-casting aluminum+tempered glass			
IP Grade	IP65			



LED flood light series




QT11023/24/25/26/27

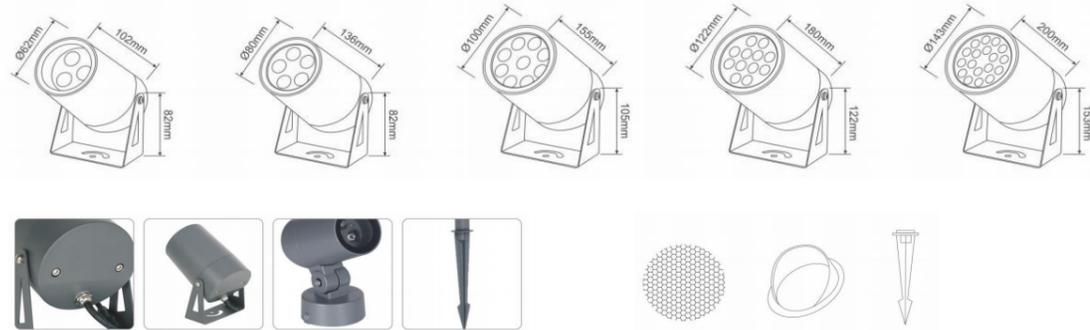

Product model	QT11023	QT11024	QT11025	QT11026	QT11027
Product power	6W-9W	10W-15/18W	18W-27/36W	24W-36/48W	36W-54/72W
Luminous color	Single CCT-RGB/RGBW	Single CCT-RGB/RGBW	Single CCT-RGB/RGBW	Single CCT-RGB/RGBW	Single CCT-RGB/RGBW
LED Qty	3PCS	5PCS	9PCS	12PCS	18PCS
Dimension	Ø62*H82MM	Ø80*H82MM	Ø100*H105MM	Ø122*H122MM	Ø143*H153MM
LED Light Source	OSRAM / CREE				
Beam Angle	5°/10°/15° /30° /45°/60°/10°30°/10°60°				
CRI	Ra 80				
Luminous efficiency	100-130LM/W				
Power factor	>0.9				
Working voltage	DC24V/ AC85-265V				
Frequency range	50-60Hz				
Drive Electrical	Mean well / DOEN				
Control mode	ON-OFF / DMX512 / DALI				
Working temperature	-40~+50°C				
Safety level	I - III				
Lamp material	Die-casting aluminum+tempered glass				
IP Grade	IP65				



QT11028/29/30

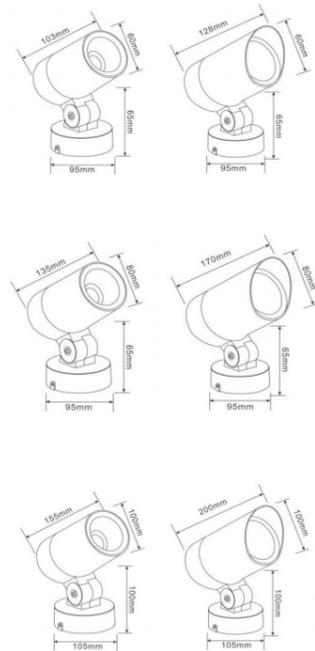


Product model	QT11028	QT11029	QT11030
Product power	5W/7W	10W/12W	20W
Luminous color	Single CCT-RGB/RGBW	Single CCT-RGB/RGBW	Single CCT-RGB/RGBW
LED Qty	1PC	1PC	1PC
Dimension	Ø60*H65MM	Ø80*H65MM	Ø100*H100MM
LED Light Source	OSRAM / CREE		
Beam Angle	25°	25°/60°	25°/38°/60°
CRI	Ra 90		
Luminous efficiency	100-130LM/W		
Power factor	>0.9		
Working voltage	DC24V/ AC85-265V		
Frequency range	50-60Hz		
Drive Electrical	Mean well / DOEN		
Control mode	ON-OFF / DMX512 / DALI		
Working temperature	-40~+50°C		
Safety level	I - III		
Lamp material	Die-casting aluminum+tempered glass		
IP Grade	IP65		




LED flood light series




QT11031/32/33

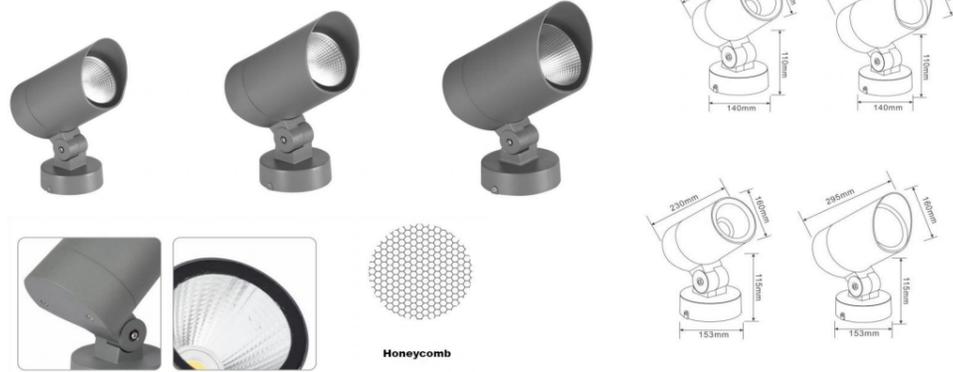



Product model	QT11031	QT11032	QT11033
Product power	30W	45W	70W
Luminous color	Single CCT-RGB/RGBW	Single CCT-RGB/RGBW	Single CCT-RGB/RGBW
LED Qty	1PC	1PC	1PC
Dimension	Ø120*H110MM	Ø140*H110MM	Ø160*H115MM
LED Light Source	OSRAM / CREE		
Beam Angle	25°/35°/60°	25°/60°	15°/25°/45°/60°
CRI	Ra 90		
Luminous efficiency	100-130LM/W		
Power factor	>0.9		
Working voltage	DC24V/ AC85-265V		
Frequency range	50-60Hz		
Drive Electrical	Mean well / DOEN		
Control mode	ON-OFF / DMX512 / DALI		
Working temperature	-40~+50°C		
Safety level	I - III		
Lamp material	Die-casting aluminum+tempered glass		
IP Grade	IP65		



QT11034/35/36

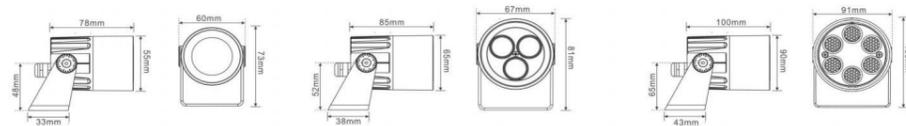



Product model	QT11034	QT11035	QT11036
Product power	1/3/5W-8W	3/6W-9/12W	6/12W-12/18W
Luminous color	Single CCT-RGB/RGBW	Single CCT-RGB/RGBW	Single CCT-RGB/RGBW
LED Qty	1PC	3PCS	6/12PCS
Dimension	Ø60*78*H73MM	Ø68*85*H81MM	Ø91*100*H106MM
LED Light Source	OSRAM / CREE		
Beam Angle	5°/10°/15°/30°/45°/60°/10*30°/10*60°		
CRI	Ra 80		
Luminous efficiency	100-130LM/W		
Power factor	>0.9		
Working voltage	DC24V/ AC85-265V		
Frequency range	50-60Hz		
Drive Electrical	Mean well / DOEN		
Control mode	ON-OFF / DMX512 / DALI		
Working temperature	-40~+50°C		
Safety level	I - III		
Lamp material	Die-casting aluminum+tempered glass		
IP Grade	IP65		

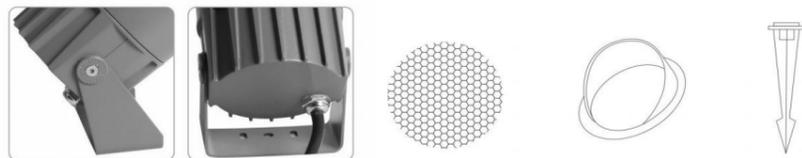

LED flood light series




QT11037/38/39/40/41

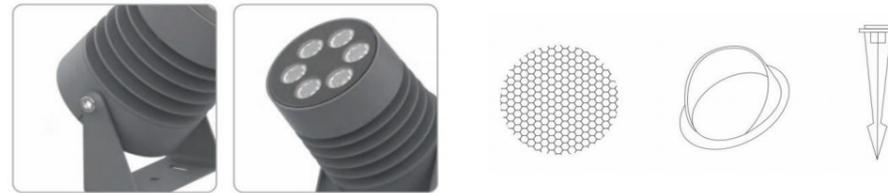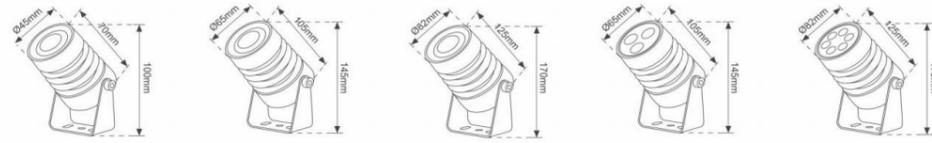

Product model	QT11037	QT11038	QT11039	QT11040	QT11041
Product power	3W	7W/10W-15W	12W/15W-20W	6W-12W	12W-20W
Luminous color	Single CCT-RGB/RGBW	Single CCT-RGB/RGBW	Single CCT-RGB/RGBW	Single CCT-RGB/RGBW	Single CCT-RGB/RGBW
LED Qty	1PC	1PC	1PC	3PCS	6PCS
Dimension	Ø45*70*H100MM	Ø65*105*H145MM	Ø82*125*H170MM	Ø65*105*H145MM	Ø82*125*H170MM
LED Light Source	OSRAM / CREE				
Beam Angle	5°/10°/15°/30°/45°/60° /10°30°/10°60°	12°/24°/36°	12°/24°/36°	5°/10°/15°/30°/45°/60° /10°30°/10°60°	5°/10°/15°/30°/45°/60° /10°30°/10°60°
CRI	Ra 80				
Luminous efficiency	100-130LM/W				
Power factor	>0.9				
Working voltage	DC24V/ AC85-265V				
Frequency range	50-60Hz				
Drive Electrical	Mean well / DOEN				
Control mode	ON-OFF / DMX512 / DALI				
Working temperature	-40~+50°C				
Safety level	I - III				
Lamp material	Die-casting aluminum+tempered glass				
IP Grade	IP65				




QT11042/43/44

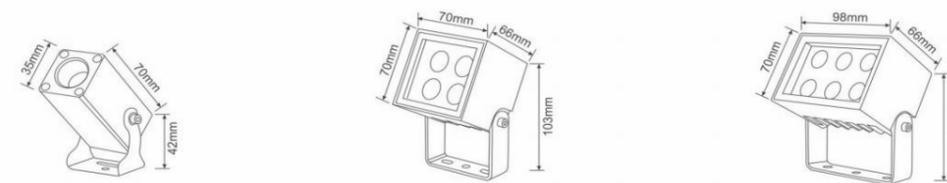

Product model	QT11042	QT11043	QT11044	QT11045	QT11046
Product power	1W/3W	4W/6W-8W	6W/9W/12W	3W-6W	6W/9W-12W
Luminous color	Single CCT-RGB/RGBW	Single CCT-RGB/RGBW	Single CCT-RGB/RGBW	Single CCT-RGB/RGBW	Single CCT-RGB/RGBW
LED Qty	1PC	3/4PCS	6PCS	3PCS	3/6PCS
Dimension	L35*W35*H42MM	L70*W70*H103MM	L98*W70*H103MM	Ø65*H85MM	Ø95*H165MM
LED Light Source	OSRAM / CREE				
Beam Angle	5°/10°/15°/30°/45°/60°				
CRI	Ra 80				
Luminous efficiency	100-130LM/W				
Power factor	>0.9				
Working voltage	DC24V/ AC85-265V				
Frequency range	50-60Hz				
Drive Electrical	Mean well / DOEN				
Control mode	ON-OFF / DMX512 / DALI				
Working temperature	-40~+50°C				
Safety level	I - III				
Lamp material	Die-casting aluminum+tempered glass				
IP Grade	IP65				



QT11045/46

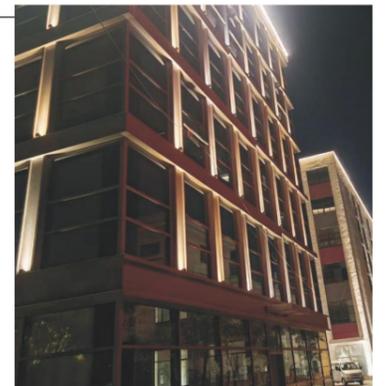


LED flood light series




QT11047

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6x4W	CREE	Single	IK05	1320lm	12/24 VDC/220-240VAC	3°/8°
12x2W	OSRAM/CREE	Single	IK05	1920lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°*60°/20°*55°
2x12W	CREE COB	Single	IK05	2400lm	24 VDC/220-240VAC	18°/24°/38°/60°
12x2.5W	OSRAM	RGB 3in 1	IK05	1160lm	12/24 VDC/220-240VAC	25°/40°/60°
12x3.5W	OSRAM	RGBW 4in 1	IK05	1400lm	12/24 VDC/220-240VAC	25°/40°/60°



QT11048

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
12x3.5W	CREE	Single	IK05	2400lm	12/24 VDC/220-240VAC	3°/8°
24x2W	OSRAM/CREE	Single	IK05	3200lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°*60°/20°*55°
4x10W	CREE COB	Single	IK05	3600lm	24 VDC/220-240VAC	18°/24°/38°/60°
24x2.5W	OSRAM	RGB 3in 1	IK05	2280lm	12/24 VDC/220-240VAC	25°/40°/60°
24x3W	OSRAM	RGBW 4in 1	IK05	2700lm	12/24 VDC/220-240VAC	25°/40°/60°



QT11049


Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
18x3W	CREE	Single	IK05	1320lm	12/24 VDC/220-240VAC	3°/8°
36x1.5W	OSRAM/CREE	Single	IK05	1920lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°*60°/20°*55°
4x13W	CREE COB	Single	IK05	2400lm	24 VDC/220-240VAC	18°/24°/38°/60°
36x2W	OSRAM	RGB 3in 1	IK05	1160lm	12/24 VDC/220-240VAC	25°/40°/60°
36x3W	OSRAM	RGBW 4in 1	IK05	1400lm	12/24 VDC/220-240VAC	25°/40°/60°




LED flood light series




QT11050/51

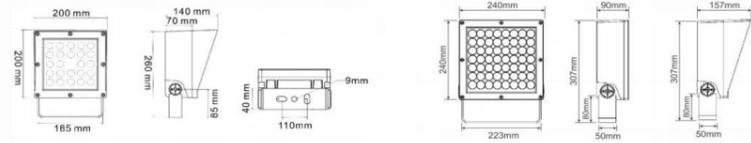


Product model	QT11050	QT11051
Product power	48W/54W-72W/96W	54W/72W-72W/108W
Luminous color	single-RGB/RGBW	single-RGB/RGBW
LED Qty	24/36PCS	54/48PCS
Lamp Size	L200*W200*H260MM	L240*W240*H307MM
LED Light Source	OSRAM/CREE	
Light Angle	5°/10°/15°/30°/45°/60°/10°30°/10°60°	
CRI	Ra 80	
Luminous efficiency	100-130LM/W	
Power factor	>0.9	
Working voltage	DC24V/AC85-265V	
Frequency range	50-60Hz	
Drive Electrical	Mean well/Doen	
Control mode	ON-OFF/DMX512/DALI	
Working temperature	-40~+50°C	
Safety level	I-III	
Lamp material	Die-casting aluminum Tempered glass	
IP Grade	IP65	

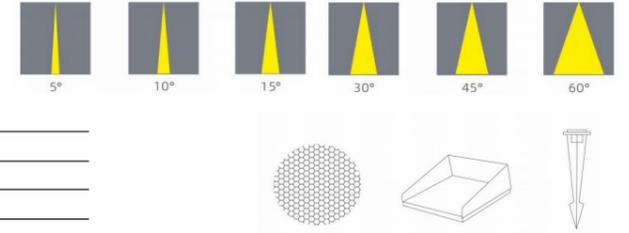

QT11052/53/54

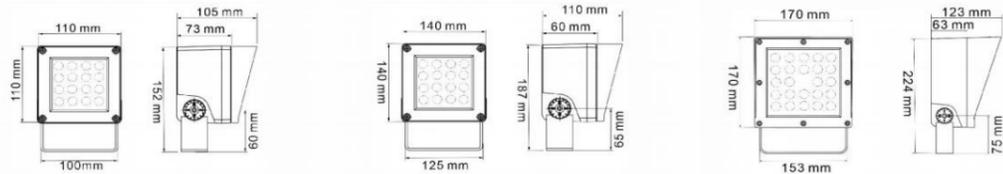

Product model	QT11052	QT11053	QT11054
Product power	12W/18W-18W/24W	18W/24W-24W/36W	36W/48W-48W/72W
Luminous color	single-RGB/RGBW	single-RGB/RGBW	single-RGB/RGBW
LED Qty	9PCS	12/18PCS	18/24PCS
Lamp Size	L110*W110*H152MM	L140*W140*H187MM	L170*W170*H224MM
LED Light Source	OSRAM/CREE		
Light Angle	5°/10°/15°/30°/45°/60°/10°30°/10°60°		
CRI	Ra 80		
Luminous efficiency	100-130LM/W		
Power factor	>0.9		
Working voltage	DC24V/AC85-265V		
Frequency range	50-60Hz		
Drive Electrical	Mean well/Doen		
Control mode	ON-OFF/DMX512/DALI		
Working temperature	-40~+50°C		
Safety level	I-III		
Lamp material	Die-casting aluminum Tempered glass		
IP Grade	IP65		

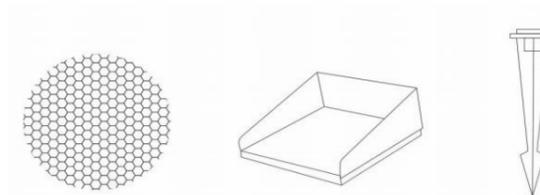


LED flood light series




QT11055

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
3x4W	CREE	Single	IK05	700lm	12/24 VDC/220-240VAC	3°/8°
6x3W	OSRAM/CREE	Single	IK05	1080lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°*60°/20°*55°
1x18W	CREE COB	Single	IK05	1520lm	24 VDC/220-240VAC	18°/24°/38°/60°
6x2.5W	OSRAM	RGB 3in 1	IK05	380lm	12/24 VDC/220-240VAC	25°/40°/60°
6x3.5W	OSRAM	RGBW 4in 1	IK05	520lm	12/24 VDC/220-240VAC	25°/40°/60°




QT11056

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
6x4W	CREE	Single	IK05	1340lm	12/24 VDC/220-240VAC	3°/8°
12x3W	OSRAM/CREE	Single	IK05	2450lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°*60°/20°*55°
1x35W	CREE COB	Single	IK05	3400lm	24 VDC/220-240VAC	18°/24°/38°/60°
12x2.5W	OSRAM	RGB 3in 1	IK05	600lm	12/24 VDC/220-240VAC	25°/40°/60°
12x3.5W	OSRAM	RGBW 4in 1	IK05	840lm	12/24 VDC/220-240VAC	25°/40°/60°




QT11057

Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
12x4W	CREE	Single	IK05	2400lm	12/24 VDC/220-240VAC	3°/8°
24x2W	OSRAM/CREE	Single	IK05	3750lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°*60°/20°*55°
4x14W	CREE COB	Single	IK05	4950lm	24 VDC/220-240VAC	18°/24°/38°/60°
24x2.5W	OSRAM	RGB 3in 1	IK05	1500lm	12/24 VDC/220-240VAC	25°/40°/60°
24x3.5W	OSRAM	RGBW 4in 1	IK05	2000lm	12/24 VDC/220-240VAC	25°/40°/60°



QT11058



Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
18x4W	CREE	Single	IK05	4500lm	12/24 VDC/220-240VAC	3°/8°
36x2W	OSRAM/CREE	Single	IK05	4900lm	12/24 VDC/220-240VAC	15°/25°/40°/60°/10°*60°/20°*55°
4x18W	CREE COB	Single	IK05	6400lm	24 VDC/220-240VAC	18°/24°/38°/60°
36x3W	OSRAM	RGB 3in 1	IK05	2700lm	12/24 VDC/220-240VAC	25°/40°/60°
36x4W	OSRAM	RGBW 4in 1	IK05	3420lm	12/24 VDC/220-240VAC	25°/40°/60°



LED flood light series




QT11059/60/61



Product model	QT11059	QT11060	QT11061
Product power	18W/24W-24W/36W	24W/36W-36W/48W	48W/60W-72W
Luminous color	single-RGB/RGBW	single-RGB/RGBW	single-RGB/RGBW
LED Qty	9/12PCS	18/24PCS	24/36PCS
Lamp Size	D150*H205MM	D190*H260MM	D210*H290MM
LED Light Source	OSRAM/CREE		
Light Angle	5°/10°/15°/30°/45°/60°/10*30°/10*60°		
CRI	Ra 80		
Luminous efficiency	100-130LM/W		
Power factor	>0.9		
Working voltage	DC24V/AC85-265V		
Frequency range	50-60Hz		
Drive Electrical	Mean well/Doen		
Control mode	ON-OFF/DMX512/DALI		
Working temperature	-40~+50°C		
Safety level	I-III		
Lamp material	Die-casting aluminum Tempered glass		
IP Grade	IP65		




QT11062/63

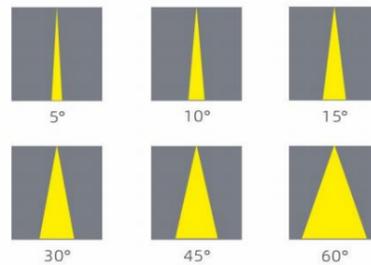


Product model	QT11062	QT11063
Product power	60W/80W-108W	120W/180W-350W
Luminous color	single-RGB/RGBW	single-RGB/RGBW
LED Qty	36/60PCS	100/120PCS
Lamp Size	D250*H330MM	D320*H410MM
LED Light Source	OSRAM/CREE	
Light Angle	5°/10°/15°/30°/45°/60°/10*30°/10*60°	
CRI	Ra 80	
Luminous efficiency	100-130LM/W	
Power factor	>0.9	
Working voltage	DC24V/AC85-265V	
Frequency range	50-60Hz	
Drive Electrical	Mean well/Doen	
Control mode	ON-OFF/DMX512/DALI	
Working temperature	-40~+50°C	
Safety level	I-III	
Lamp material	Die-casting aluminum Tempered glass	
IP Grade	IP65	



LED flood light series




QT11064/65/66

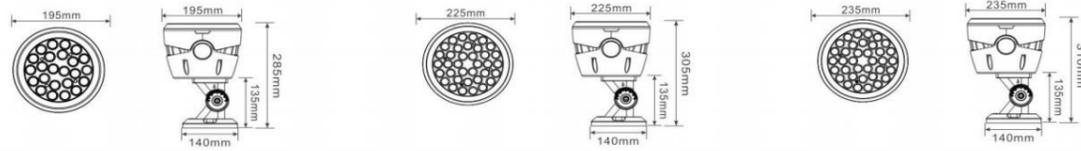

Product model	QT11064	QT11065	QT11066
Product power	48W-72W	72W-108W	100W-144W
Luminous color	single-RGB/RGBW	single-RGB/RGBW	single-RGB/RGBW
LED Qty	24PCS	36PCS	48PCS
Lamp Size	L195*W285*H135MM	L225*W305*H135MM	L235*W310*H135MM
LED Light Source	OSRAM/CREE		
Light Angle	5°/10°/15°/30°/45°/60°/10°30°		
CRI	Ra 80		
Luminous efficiency	100-130LM/W		
Power factor	>0.9		
Working voltage	DC24V/AC85-265V		
Frequency range	50-60Hz		
Drive Electrical	Mean well/Doen		
Control mode	ON-OFF/DMX512/DALI		
Working temperature	-40~+50°C		
Safety level	I-III		
Lamp material	Die-casting aluminum Tempered glass		
IP Grade	IP65		




QT11067/68/69

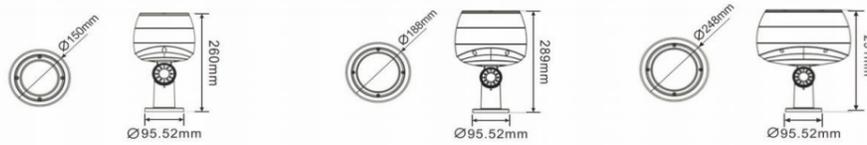

Product model	QT11067	QT11068	QT11069
Product power	18W	36W	72W
Luminous color	SINGLE CCT	SINGLE CCT	SINGLE CCT
LED Qty	9PCS	18PCS	72PCS
Lamp Size	D150*H260MM	D188*H289MM	D248*H291MM
LED Light Source	OSRAM/CREE		
Light Angle	5°/10°/15°/25°/45°/60°/90°		
CRI	Ra 80		
Luminous efficiency	100-130LM/W		
Power factor	>0.9		
Working voltage	DC24V/AC85-265V		
Frequency range	50-60Hz		
Drive Electrical	Mean well/Doen		
Control mode	ON-OFF/DMX512/DALI		
Working temperature	-40~+50°C		
Safety level	I-III		
Lamp material	Die-casting aluminum Tempered glass		
IP Grade	IP65		



QT11070/71/72

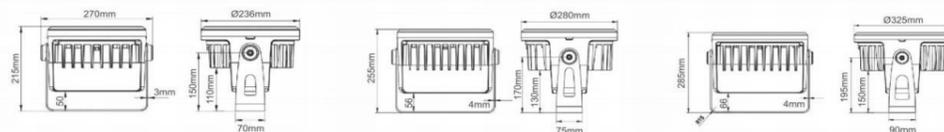


Product model	QT11070	QT11071	QT11072
Product power	100W-144W	150W-216W	200W-324W
Luminous color	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW
LED Qty	48PCS	72PCS	108PCS
Lamp Size	D236*H215MM	D280*H255MM	D325*H285MM
LED Light Source	OSRAM/CREE		
Light Angle	5°/10°/15°/30°/45°/60°/10°30°/10°60°		
CRI	Ra 80		
Luminous efficiency	100-130LM/W		
Power factor	>0.9		
Working voltage	DC24V/AC85-265V		
Frequency range	50-60Hz		
Drive Electrical	Mean well/Doen		
Control mode	ON-OFF/DMX512/DALI		
Working temperature	-40~+50°C		
Safety level	I-III		
Lamp material	Die-casting aluminum Tempered glass		
IP Grade	IP65		

LED flood light series




QT11073/74/75/76

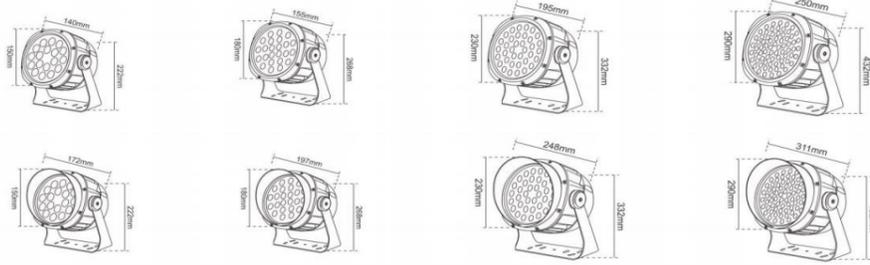


Product model	QT11073	QT11074	QT11075	QT11076
Product power	18/24W-36W	36/48W-48/60W	48/60W-72/90W	108/150/200W
Luminous color	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW
LED Qty	12/18PCS	18/24/36PCS	24/36PCS	54/72/100PCS
Lamp Size	D150*140*H222MM	D180*155*H268MM	D230*195*H332MM	D290*250*H432MM
LED Light Source	OSRAM/CREE			
Light Angle	5°/10°/15°/30°/45°/60°/90°			
CRI	Ra 80			
Luminous efficiency	100-130LM/W			
Power factor	>0.9			
Working voltage	DC24V/AC85-265V			
Frequency range	50-60Hz			
Drive Electrical	Mean well/Doen			
Control mode	ON-OFF/DMX512/DALI			
Working temperature	-40~+50°C			
Safety level	I-III			
Lamp material	Die-casting aluminum Tempered glass			
IP Grade	IP65			



QT11077/78

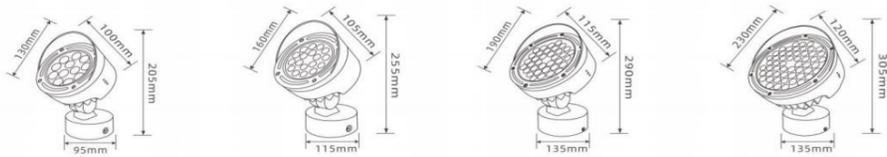


Product model	QT11077	QT11078
Product power	36/48W-72W	54W/72W-108W
Luminous color	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW
LED Qty	24PCS	36PCS
Lamp Size	L190*W115*H290MM	L230*W120*H305MM
LED Light Source	OSRAM/CREE	
Light Angle	5°/10°/15°/30°/45°/60°/10°30°	
CRI	Ra 80	
Luminous efficiency	100-130LM/W	
Power factor	>0.9	
Working voltage	DC24V/AC85-265V	
Frequency range	50-60Hz	
Drive Electrical	Mean well/Doen	
Control mode	ON-OFF/DMX512/DALI	
Working temperature	-40~+50°C	
Safety level	I-III	
Lamp material	Die-casting aluminum Tempered glass	
IP Grade	IP65	

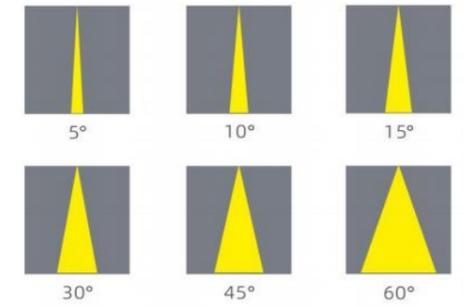

LED flood light series




QT11079/80/81

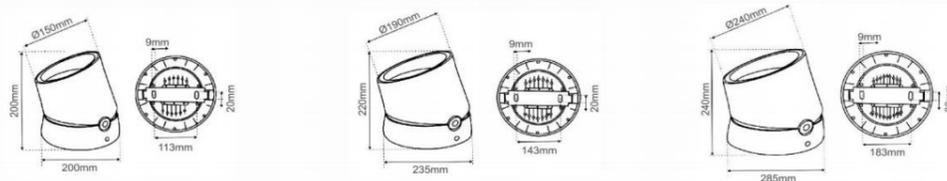

Product model	QT11079	QT11080	QT11081
Product power	24W/36W-48W	36W/54W-72W	54W/72W-108W
Luminous color	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW
LED Qty	18PCS	36PCS	54/72PCS
Lamp Size	D150*H200MM	D190*H220MM	D240*H240MM
LED Light Source	OSRAM/CREE		
Light Angle	5°/10°/15°/30°/45°/60°/10°30°/10°60°		
CRI	Ra 80		
Luminous efficiency	100-130LM/W		
Power factor	>0.9		
Working voltage	DC24V/AC85-265V		
Frequency range	50-60Hz		
Drive Electrical	Mean well/Doen		
Control mode	ON-OFF/DMX512/DALI		
Working temperature	-40~+50°C		
Safety level	I-III		
Lamp material	Die-casting aluminum Tempered glass		
IP Grade	IP65		




QT11082/83/84



Product model	QT11082	QT11083	QT11084
Product power	30W-54W	48W-72W	60W-90/108W
Luminous color	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW
LED Qty	9PCS	12PCS	18PCS
Lamp Size	L175*W145*H155MM	L210*W145*H166MM	L300*W145*H160MM
LED Light Source	OSRAM/CREE		
Light Angle	3°/5°/15°/45°/60°/10°30°		
CRI	Ra 80		
Luminous efficiency	100-130LM/W		
Power factor	>0.9		
Working voltage	DC24V/AC85-265V		
Frequency range	50-60Hz		
Drive Electrical	Mean well/Doen		
Control mode	ON-OFF/DMX512/DALI		
Working temperature	-40~+50°C		
Safety level	I-III		
Lamp material	Die-casting aluminum Tempered glass		
IP Grade	IP65		



QT11085/86/87

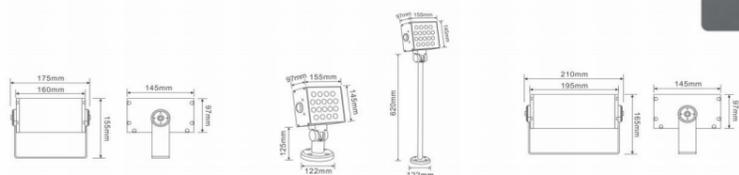

Product model	QT11085	QT11086	QT11087
Product power	36W-54/72W	36W-54/72W	36W/48W-54/72W
Luminous color	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW
LED Qty	18PCS	18PCS	24PCS
Lamp Size	L175*W145*H155MM	L155*W145*H125MM	L210*W145*H165MM
LED Light Source	OSRAM/CREE		
Light Angle	5°/10°/15°/30°/45°/60°/10°30°/10°60°		
CRI	Ra 80		
Luminous efficiency	100-130LM/W		
Power factor	>0.9		
Working voltage	DC24V/AC85-265V		
Frequency range	50-60Hz		
Drive Electrical	Mean well/Doen		
Control mode	ON-OFF/DMX512/DALI		
Working temperature	-40~+50°C		
Safety level	I-III		
Lamp material	Die-casting aluminum Tempered glass		
IP Grade	IP65		

LED Inground Lighting



Inground Lighting series



Dimensions



Product model	QT12001	QT12002
Product power	12W	20W
Luminous color	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW
LED Qty	1PC	1PC
Lamp Size	D130MM*H139MM	D160MM*H145MM
Lamp Size	D120MM	D145MM
LED Light Source	OSRAM/CREE	
Light Angle	30°/45°	
CRI	Ra 80	
Luminous efficiency	100-130LM/W	
Power factor	>0.9	
Working voltage	DC24V/AC85-265V	
Frequency range	50-60Hz	
Drive Electrical	Mean well/Doen	
Control mode	ON-OFF/DMX512/DALI	
Working temperature	-40~+50°C	
Safety level	I-III	
Lamp material	Die-casting aluminum Tempered glass	
IP Grade	IP67	

Inground Lighting Series




QT12003/004/005/006



Product model	QT12003	QT12004	QT12005	QT12006
Product power	9W/15W-18W	12W/18W-24W	24W/36W-48W	36W/48W-72W
Luminous color	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW
LED Qty	9PCS	12PCS	24PCS	36PCS
Lamp Size	D160MM*H110MM	D180MM*H120MM	D230MM*H120MM	D260MM*H120MM
Lamp Size	D130MM	D153MM	D193MM	D222MM
LED Light Source	OSRAM/CREE			
Light Angle	5°/10°/15°/30°/60°/90°/30°45°			
CRI	Ra 80			
Luminous efficiency	100-130LM/W			
Power factor	>0.9			
Working voltage	DC24V/AC85-265V			
Frequency range	50-60Hz			
Drive Electrical	Mean well/Doen			
Control mode	ON-OFF/DMX512/DALI			
Working temperature	-40~+50°C			
Safety level	I-III			
Lamp material	Die-casting aluminum Tempered glass			
IP Grade	IP67			




QT12007/008/009/010

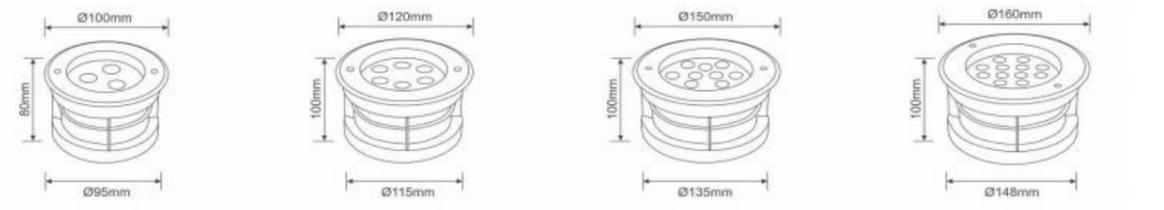

Product model	QT12007	QT12008	QT12009	QT12010
Product power	3W/6W-9W	6W/9W-12W	9W/12W-18W	12W/18W-18/24W
Luminous color	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW
LED Qty	3PCS	3/6PCS	9PCS	9/12PCS
Lamp Size	D100MM*H80MM	D120MM*H100MM	D150MM*H100MM	D160MM*H100MM
CUT HOLE	D95MM	D115MM	D135MM	D148MM
LED Light Source	OSRAM/CREE			
Light Angle	5°/10°/15°/30°/60°/90°/30°45°			
CRI	Ra 80			
Luminous efficiency	100-130LM/W			
Power factor	>0.9			
Working voltage	DC24V/AC85-265V			
Frequency range	50-60Hz			
Drive Electrical	Mean well/Doen			
Control mode	ON-OFF/DMX512/DALI			
Working temperature	-40~+50°C			
Safety level	I-III			
Lamp material	Die-casting aluminum Tempered glass			
IP Grade	IP67			



QT12011/012/013/014

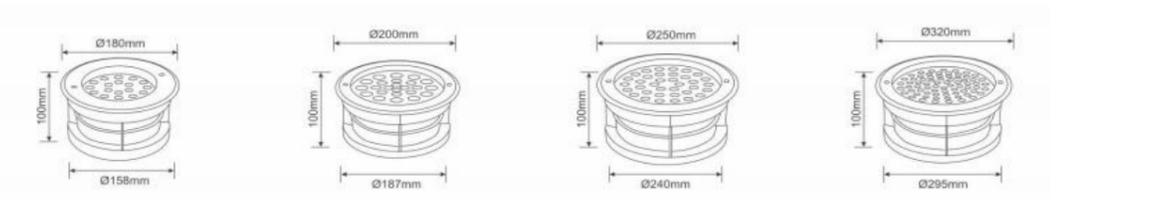

Product model	QT12011	QT12012	QT12013	QT12014
Product power	18/24W-24/36W	24/36W-36/48W	36/48W-48/72W	54W/72W-108W
Luminous color	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW
LED Qty	12/18PCS	18/24PCS	24/36PCS	36/72PCS
Lamp Size	D180MM*H100MM	D200MM*H100MM	D250MM*H100MM	D320MM*H100MM
CUT HOLE	D158MM	D187MM	D240MM	D295MM
LED Light Source	OSRAM/CREE			
Light Angle	5°/10°/15°/30°/60°/90°/30°45°			
CRI	Ra 80			
Luminous efficiency	100-130LM/W			
Power factor	>0.9			
Working voltage	DC24V/AC85-265V			
Frequency range	50-60Hz			
Drive Electrical	Mean well/Doen			
Control mode	ON-OFF/DMX512/DALI			
Working temperature	-40~+50°C			
Safety level	I-III			
Lamp material	Die-casting aluminum Tempered glass			
IP Grade	IP67			

Inground Lighting Series



QT12015/016/017



Product model	QT12015	QT12016	QT12017
Product power	6W-12W	9W-18W	18W-36W
Luminous color	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW
LED Qty	6PCS	9PCS	18PCS
Lamp Size	D150MM*H128MM	D180MM*H148MM	D210MM*H158MM
CUT HOLE	D143MM	D168MM	D198MM
LED Light Source	OSRAM/CREE		
Light Angle	5°/10°/15°/30°/60°/90°		
CRI	Ra 80		
Luminous efficiency	100-130LM/W		
Power factor	>0.9		
Working voltage	DC24V/AC85-265V		
Frequency range	50-60Hz		
Drive Electrical	Mean well/Doen		
Control mode	ON-OFF/DMX512/DALI		
Working temperature	-40~+50°C		
Safety level	I-III		
Lamp material	Die-casting aluminum Tempered glass		
IP Grade	IP67		



QT12018/019/020/21



Product model	QT12018	QT12019	QT12020	QT12021
Product power	10W	15/20W	20/30W	40/45W
Luminous color	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW
LED Qty	1PCS	1PCS	1PCS	1PCS
Lamp Size	D130MM*H139MM	D160MM*H154MM	D200MM*H175MM	D260MM*H196MM
CUT HOLE	D115MM	D145MM	D168MM	D240MM
LED Light Source	OSRAM/CREE			
Light Angle	24°			
CRI	Ra 80			
Luminous efficiency	100-130LM/W			
Power factor	>0.9			
Working voltage	DC24V/AC85-265V			
Frequency range	50-60Hz			
Drive Electrical	Mean well/Doen			
Control mode	ON-OFF/DMX512/DALI			
Working temperature	-40~+50°C			
Safety level	I-III			
Lamp material	Die-casting aluminum Tempered glass			
IP Grade	IP67			



QT12022/023/024/25




Product model	QT12022	QT12023	QT12024	QT12025
Product power	0.2W	0.2W	0.5W	0.5/1W
Luminous color	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW
LED Qty	1PCS	1PCS	1PCS	1PCS
Lamp Size	D13MM*H35MM	D15MM*H26MM	D22MM*H55MM	D32MM*H50MM
CUT HOLE	D10MM	D13MM	D17MM	D25MM
LED Light Source	OSRAM/CREE			
Light Angle	120°			
CRI	Ra 80			
Luminous efficiency	90LM/W			
Power factor	>0.9			
Working voltage	DC24V/AC85-265V			
Frequency range	50-60Hz			
Drive Electrical	Mean well/Doen			
Control mode	ON-OFF/DMX512/DALI			
Working temperature	-40~+50°C			
Safety level	I-III			
Lamp material	304 STAINLESS STEEL +Tempered glass			
IP Grade	IP68			

Inground Lighting Series



QT12026/027/028/29

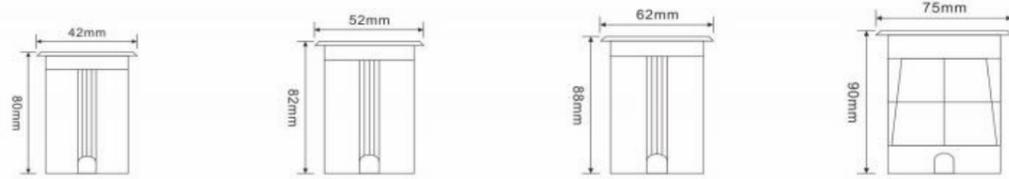

Product model	QT12026	QT12027	QT12028	QT12029
Product power	1W	1W	1/2W	3/6W
Luminous color	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW
LED Qty	1PCS	1PCS	1PCS	3PCS
Lamp Size	D42MM*H80MM	D52MM*H82MM	D62MM*H88MM	D75MM*H90MM
CUT HOLE	D38MM	D45MM	D55MM	D65MM
LED Light Source	OSRAM/CREE			
Light Angle	5°/10°/15°/25°/45°/60°/90°			
CRI	Ra 80			
Luminous efficiency	100-130LM/W			
Power factor	>0.9			
Working voltage	DC24V/AC85-265V			
Frequency range	50-60Hz			
Drive Electrical	Mean well/Doen			
Control mode	ON-OFF/DMX512/DALI			
Working temperature	-40~+50°C			
Safety level	I-III			
Lamp material	304 STAINLESS STEEL +Tempered glass			
IP Grade	IP68			



QT12030/031




QT12032/033




QT12034/035


Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1*2W CREE XPE/OSRAM 3030	Steel	IK10	120LM	12/24VDC	5°/10°/15°/20°/30°/40°/60°/10°45°/25°45°
1*4W CREE 1304	Steel	IK08	340LM	12/24VDC 220-240VAC	15°/24°/36°/55°




Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1*4.5W CREE 1304	Steel	IK08	454LM	12/24VDC 220-240VAC	12°/24°/36°/55°
1*6.5W CREE 1512	Steel	IK08	720LM	12/24VDC 220-240VAC	12°/24°/36°/55°




Power LED	Color	IK	Luminous	Input Voltage	Beam Angle
1*10W CREE 1512	Steel	IK08	900LM	12/24VDC 220-240VAC	12°/24°/36°/55°
1*15W CREE 1512	Steel	IK08	1300LM	12/24VDC 220-240VAC	12°/24°/36°/55°



Inground Lighting Series

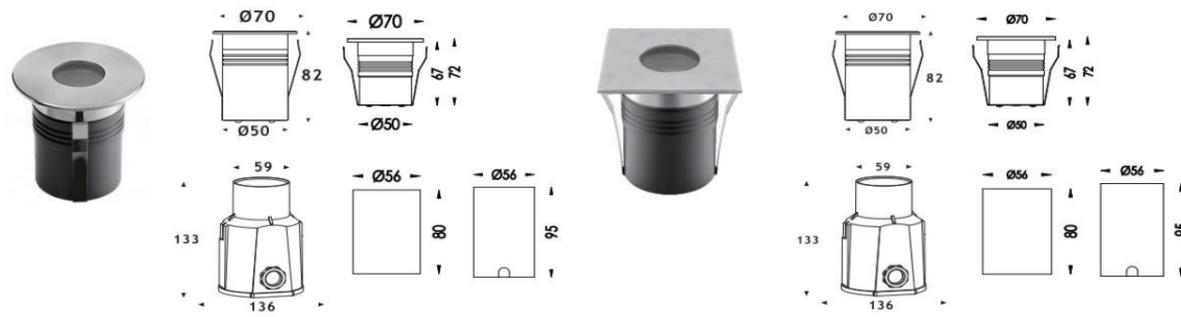

QT12036

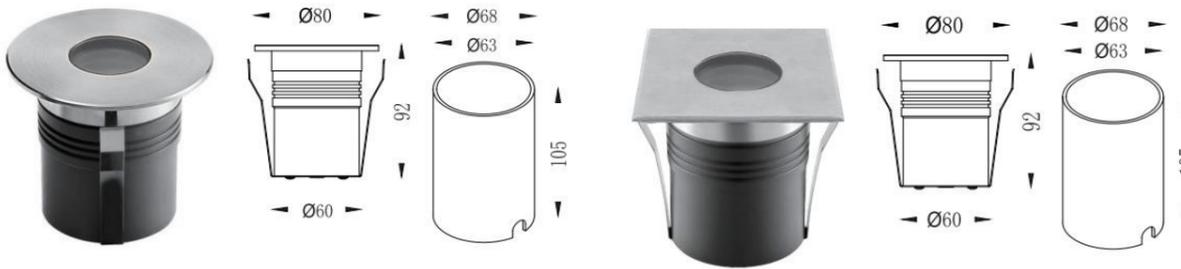

QT12037



QT12038/39/40



Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x4W	CREE COB	Single	IK09	398lm	12/24 VDC	15°/24°/36°/60°
1x5W	CREE COB	Single	IK09	508lm	12/24 VDC/220-240VAC	15°/24°/36°/60°
1x6W	OSRAM	RGB 3in 1	IK09	170lm	12/24 VDC	15°/25°/40°/60°
1x8W	OSRAM	RGBW 4in 1	IK09	225lm	12/24 VDC	15°/25°/40°/60°



Power	LED	CCT	IK	Luminous	Input Voltage	Beam Angle
1x9W	CREE COB	Single	IK09	904lm	12/24 VDC/220-240VAC	15°/24°/36°/60°
1x9W	OSRAM	RGB 3in 1	IK09	241lm	12/24 VDC	15°/25°/40°/60°
1x10W	OSRAM	RGBW 4in 1	IK09	281lm	12/24 VDC	15°/25°/40°/60°


Product model	QT12038	QT12039	QT12040
Product power	1W	3W	3W
Luminous color	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW
LED Qty	1PCS	3PCS	3PCS
Lamp Size	D68*H95MM	D80MM*H105MM	D100MM*H110MM
CUT HOLE	D60MM	D75MM	D95MM
LED Light Source	OSRAM/CREE		
Light Angle	60°/90°		
CRI	Ra 80		
Luminous efficiency	100-130LM/W		
Power factor	>0.9		
Working voltage	DC24V/AC85-265V		
Frequency range	50-60Hz		
Drive Electrical	Mean well/Doen		
Control mode	ON-OFF/DMX512/DALI		
Working temperature	-40~+50°C		
Safety level	I-III		
Lamp material	ADC12 Die-casting aluminum + 304 stainless steel		
IP Grade	IP67		



Inground Lighting Series




QT12041/42

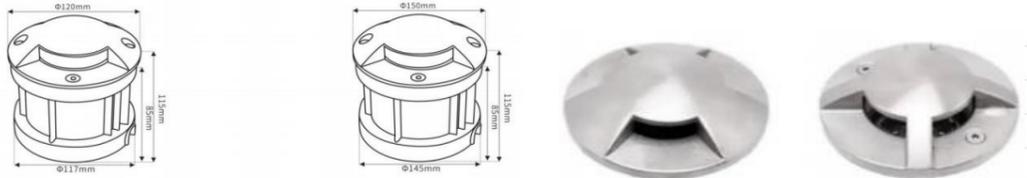

Linear Inground Lighting Series




QT13001/02/03



QT13004/05




Product model	QT12041	QT12042
Product power	5W/6W	9W/12W
Luminous color	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW
LED Qty	5/6PCS	9/12PCS
Lamp Size	D120*H115MM	D150*H115MM
CUT HOLE	D117MM	D145MM
LED Light Source	OSRAM/CREE	
Light Angle	60°/90°	
CRI	Ra 80	
Luminous efficiency	100-130LM/W	
Power factor	>0.9	
Working voltage	DC24V/AC85-165V	
Frequency range	50-60Hz	
Drive Electrical	Mean well/Doen	
Control mode	ON-OFF/DMX512/DALI	
Working temperature	-40~+50°C	
Safety level	I-III	
Lamp material	ADC12 Die-casting aluminum + 304 stainless steel	
IP Grade	IP67	



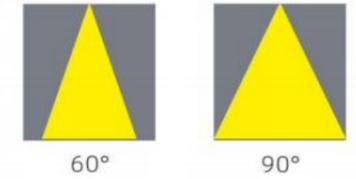


Product model	QT12043	QT12044	QT12045
Product power	18/24W-36/48W	18/24W/36W-36/48W	18/24W/36W-36/48W
Luminous color	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW
LED Qty	18/24PCS	18/24/36PCS	18/24/36PCS
Lamp Size	L1000*W35*65MM	L1000*W50*70MM	L1000*W75*70MM
LED Light Source	OSRAM/CREE		
Light Angle	5°/10°/15°/30°/60°/90°/15°45°/10°60°		
CRI	Ra 80		
Luminous efficiency	100-130LM/W		
Power factor	>0.9		
Working voltage	DC24V		
Frequency range	50-60Hz		
Drive Electrical	Mean well/Doen		
Control mode	ON-OFF/DMX512/DALI		
Working temperature	-40~+50°C		
Safety level	I-III		
Lamp material	ADC12 Die-casting aluminum + 304 stainless steel		
IP Grade	IP67		

Product model	QT13004	QT13005
Product power	18/24/36W-36/48W	18/24/36W-36/48W
Luminous color	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW
LED Qty	18/24/36PCS	18/24/36PCS
Lamp Size	L1000*W90*90MM	L1000*W90*90MM
LED Light Source	OSRAM/CREE	
Light Angle	5°/10°/15°/30°/60°/90°/15°45°/10°60°	
CRI	Ra 80	
Luminous efficiency	100-130LM/W	
Power factor	>0.9	
Working voltage	DC24V	
Frequency range	50-60Hz	
Drive Electrical	Mean well/Doen	
Control mode	ON-OFF/DMX512/DALI	
Working temperature	-40~+50°C	
Safety level	I-III	
Lamp material	ADC12 Die-casting aluminum + 304 stainless steel	
IP Grade	IP67	



Linear Inground Lighting Series

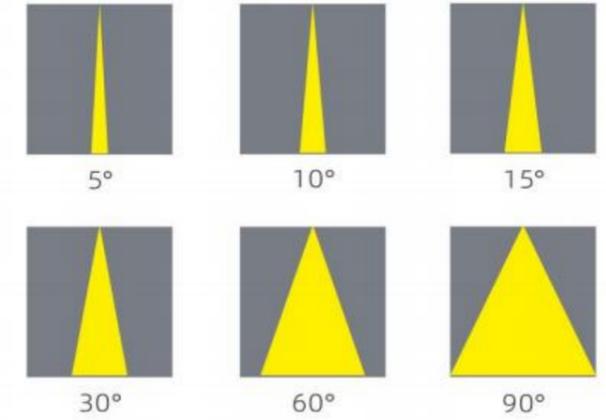
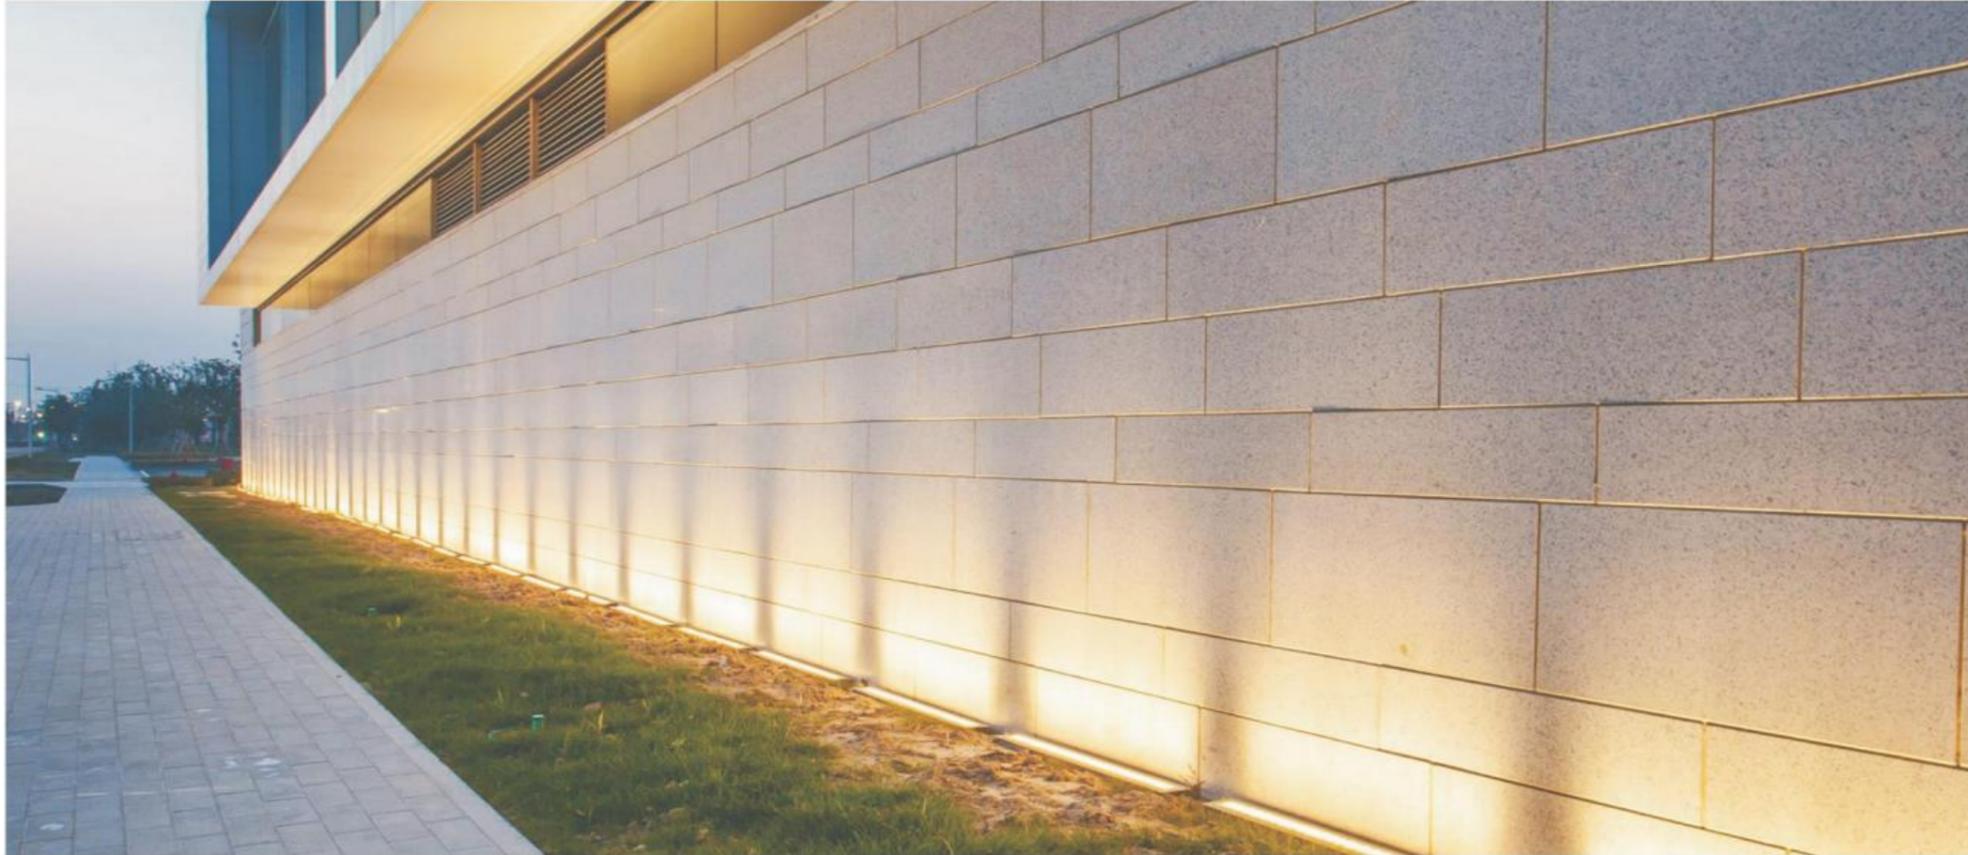


QM-DMD105125

可调节偏光照射角度最大30度
Adjustable polarizing angle up to 30°



QT13006/07



Product model	QT13006	QT13007
Product power	18/24W-36/48W	18/24/36W-36/48W
Luminous color	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW
LED Qty	18/24PCS	18/24/36PCS
Lamp Size	L1000*W90*H78MM	L1000*W105*H125MM
LED Light Source	OSRAM/CREE	
Light Angle	5°/10°/15°/30°/60°/90°/20°45°/10°60°	
CRI	Ra 80	
Luminous efficiency	100-130LM/W	
Power factor	>0.9	
Working voltage	DC24V/AC85-265V	
Frequency range	50-60Hz	
Drive Electrical	Mean well/Doen	
Control mode	ON-OFF/DMX512/DALI	
Working temperature	-40~+50°C	
Safety level	I-III	
Lamp material	ADC12 Die-casting aluminum + 304 stainless steel	
IP Grade	IP67	



Linear Inground Lighting Series




QT13008/09



QT13010/11




Product model	QT13008	QT13009	QT13010	QT13011
Product power	12/15W	12/15W	12/15W	12/15W
Luminous color	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW
LED Qty	48PCS	48PCS	48PCS	48PCS
Lamp Size	L1000*W22*55MM	L1000*W32*59MM	L1000*W42*58MM	L1000*W50*59MM
LED Light Source	OSRAM/CREE			
Light Angle	120°			
CRI	Ra 80			
Luminous efficiency	100-130LM/W			
Power factor	>0.9			
Working voltage	DC24V			
Frequency range	50-60Hz			
Drive Electrical	Mean well/Doen			
Control mode	ON-OFF/DMX512/DALI			
Working temperature	-40~+50°C			
Safety level	I-III			
Lamp material	6063 aluminum + 304 stainless steel			
IP Grade	IP67			

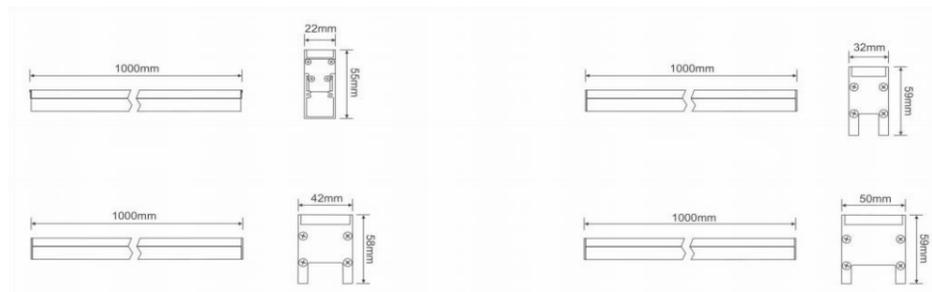

Wall Washer Lighting Series




Distribution Curve:

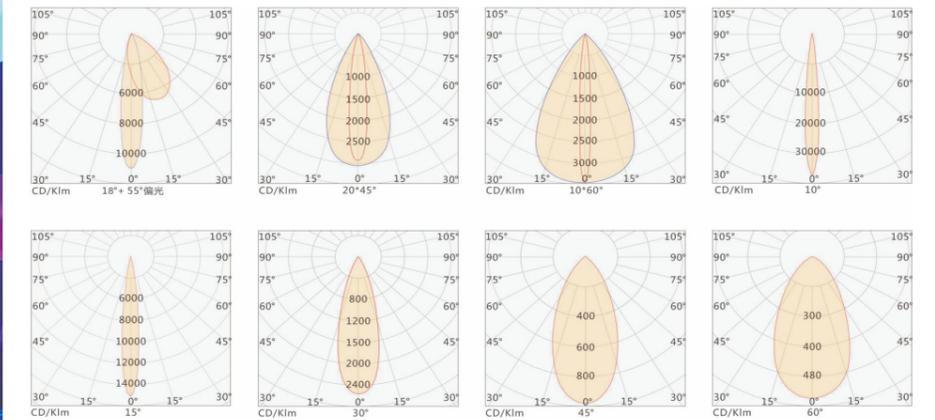


Lamp Wiring Diagram:


Single Color Scheme



RGB Low Voltage

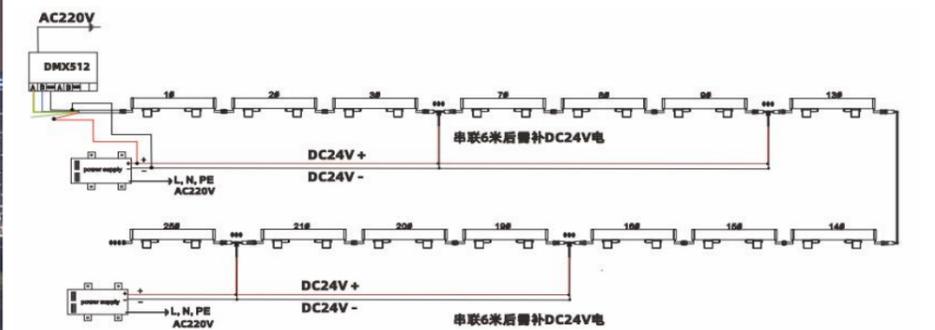


Beam angle

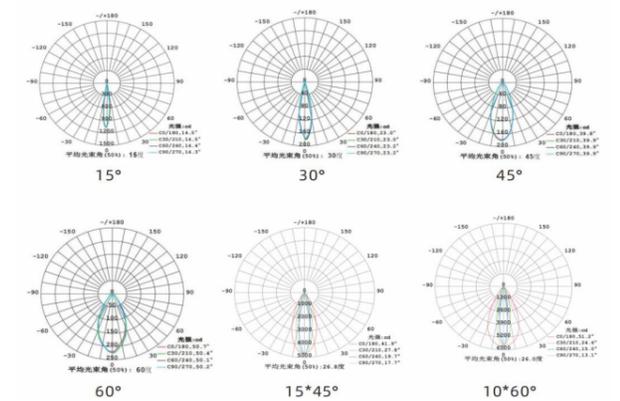


Wall Washer Lighting Series




QT14001

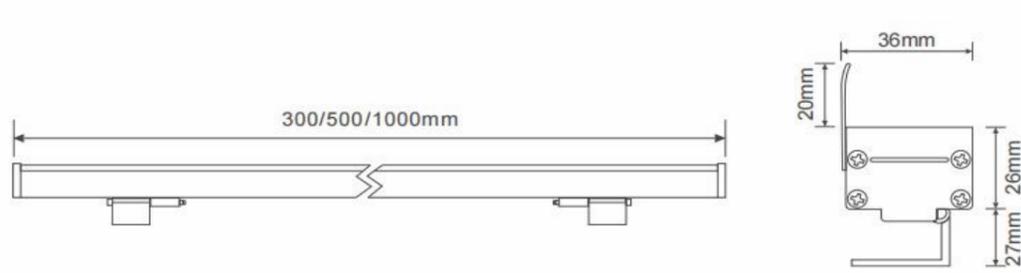

Product model	QT14001
Product power	18W/24W-36W/48W
Luminous color	SINGLE CCT-RGB/RGBW
LED Qty	18/24PCS
Lamp Size	L1000*W36*H26MM
LED Light Source	OSRAM/CREE
Light Angle	5°/10°/15°/30°/45°/60°/15*45°/10*60°
CRI	Ra 80
Luminous efficiency	100-130LM/W
Power factor	>0.9
Working voltage	DC24V
Frequency range	50-60Hz
Drive Electrical	Mean well/Doen
Control mode	ON-OFF/DMX512/DALI
Working temperature	-40~+50°C
Safety level	I-III
Lamp material	6063 aluminum + 304 stainless steel
IP Grade	IP65

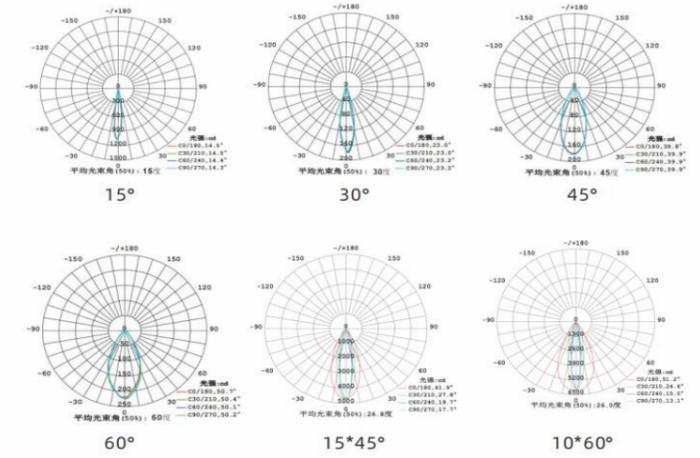

QT14002

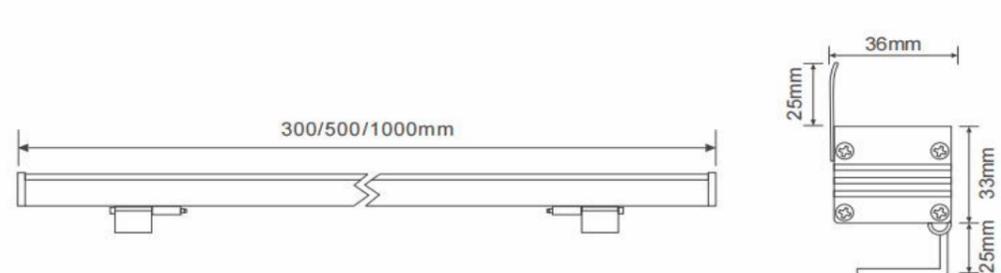



Product model	QT14002
Product power	18W/24W-36W/48W
Luminous color	SINGLE CCT-RGB/RGBW
LED Qty	18/24/36PCS
Lamp Size	L1000*W36*H33MM
LED Light Source	OSRAM/CREE
Light Angle	5°/10°/15°/30°/45°/60°/15*45°/10*60°
CRI	Ra 80
Luminous efficiency	100-130LM/W
Power factor	>0.9
Working voltage	DC24V
Frequency range	50-60Hz
Drive Electrical	Mean well/Doen
Control mode	ON-OFF/DMX512/DALI
Working temperature	-40~+50°C
Safety level	I-III
Lamp material	6063 aluminum + 304 stainless steel
IP Grade	IP65




Wall Washer Lighting Series



产品尺寸 Product Size:

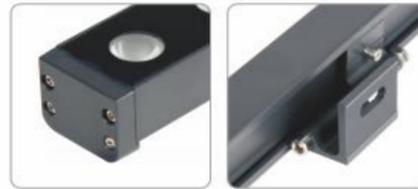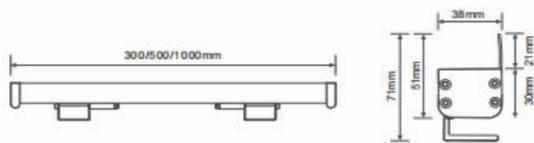

产品尺寸 Product Size:

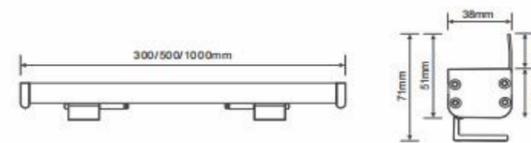

QT14003

Product model	QT14003
Product power	18W/24W-36W/48W
Luminous color	SINGLE CCT-RGB/RGBW
LED Qty	18/24/36PCS
Lamp Size	L1000*W38*H27MM
LED Light Source	OSRAM/CREE
Light Angle	5°/10°/15°/30°/45°/60°/15*45°/10*60°
CRI	Ra 80
Luminous efficiency	100-130LM/W
Power factor	>0.9
Working voltage	DC24V
Frequency range	50-60Hz
Drive Electrical	Mean well/Doen
Control mode	ON-OFF/DMX512/DALI
Working temperature	-40~+50°C
Safety level	I-III
Lamp material	6063 aluminum + 304 stainless steel
IP Grade	IP65


QT14004

Product model	QT14004
Product power	18W/24W-36W/48W
Luminous color	SINGLE CCT-RGB/RGBW
LED Qty	18/24/36PCS
Lamp Size	L1000*W38*H27MM
LED Light Source	OSRAM/CREE
Light Angle	5°/10°/15°/30°/45°/60°/15*45°/10*60°
CRI	Ra 80
Luminous efficiency	100-130LM/W
Power factor	>0.9
Working voltage	DC24V
Frequency range	50-60Hz
Drive Electrical	Mean well/Doen
Control mode	ON-OFF/DMX512/DALI
Working temperature	-40~+50°C
Safety level	I-III
Lamp material	6063 aluminum + 304 stainless steel
IP Grade	IP65


QT14005



产品尺寸 Product Size:

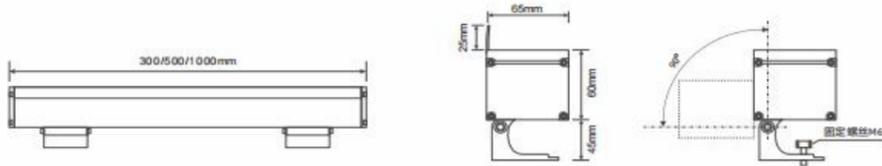

配光曲线 Distribution Curve:

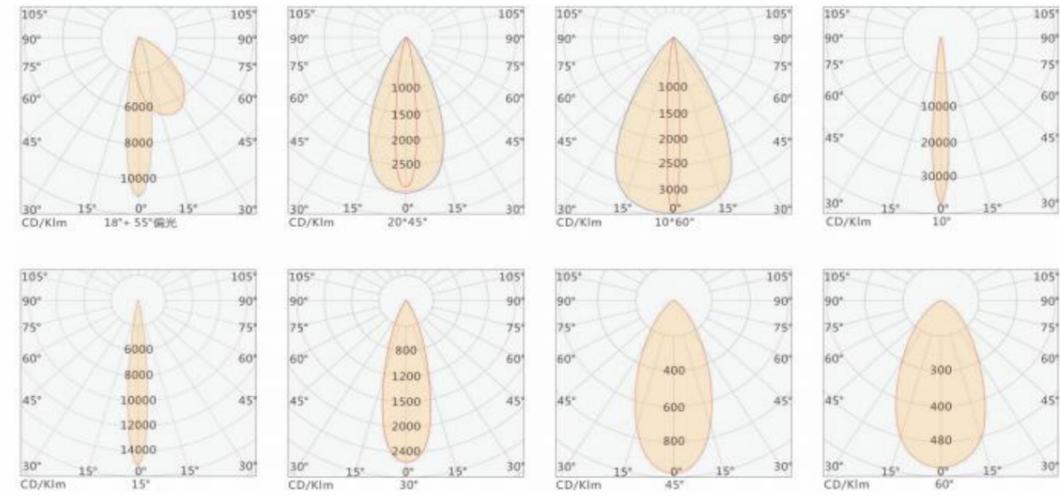


技术参数 Technical Parameter:

Product model	QT14005
Product power	48W/72W-72/96W
Luminous color	SINGLE CCT-RGB/RGBW
LED Qty	48/72PCS
Lamp Size	L1000*W65*H60MM
LED Light Source	OSRAM/CREE
Light Angle	5°/10°/15°/30°/45°/60°/15*45°/10*60°
CRI	Ra 80
Luminous efficiency	100-130LM/W
Power factor	>0.9
Working voltage	DC24V/AC85-265V
Frequency range	50-60Hz
Drive Electrical	Mean well/Doen
Control mode	ON-OFF/DMX512/DALI
Working temperature	-40~+50°C
Safety level	I-III
Lamp material	6063 aluminum + 304 stainless steel
IP Grade	IP65





产品尺寸 Product Size:

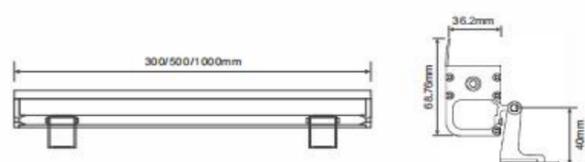


QT14006

Product model	QT14006
Product power	48W/72W-72/96W
Luminous color	SINGLE CCT-RGB/RGBW
LED Qty	18/24/36PCS
Lamp Size	L1000*W36*H66MM
LED Light Source	OSRAM/CREE
Light Angle	5°/10°/15°/30°/45°/60°/15*45°/10*60°
CRI	Ra 80
Luminous efficiency	100-130LM/W
Power factor	>0.9
Working voltage	DC24V/AC85-265V
Frequency range	50-60Hz
Drive Electrical	Mean well/Doen
Control mode	ON-OFF/DMX512/DALI
Working temperature	-40~+50°C
Safety level	I-III
Lamp material	6063 aluminum + 304 stainless steel
IP Grade	IP65



产品尺寸 Product Size:

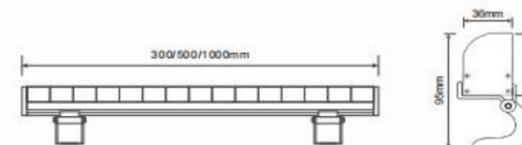

QT14007

Product model	QT14007
Product power	48W/72W-72/96W
Luminous color	SINGLE CCT-RGB/RGBW
LED Qty	18/24PCS
Lamp Size	L1000*W36*H54MM
LED Light Source	OSRAM/CREE
Light Angle	5°/10°/15°/30°/45°/60°/15*45°/10*60°
CRI	Ra 80
Luminous efficiency	100-130LM/W
Power factor	>0.9
Working voltage	DC24V/AC85-265V
Frequency range	50-60Hz
Drive Electrical	Mean well/Doen
Control mode	ON-OFF/DMX512/DALI
Working temperature	-40~+50°C
Safety level	I-III
Lamp material	6063 aluminum + 304 stainless steel
IP Grade	IP65



产品尺寸 Product Size:




QT14008

Product model	QT14008
Product power	18W/24W-36/48W
Luminous color	SINGLE CCT-RGB/RGBW
LED Qty	18/24PCS
Lamp Size	L1000*W36*H26MM
LED Light Source	OSRAM/CREE
Light Angle	5°/10°/15°/30°/45°/60°/15*45°/10*60°
CRI	Ra 80
Luminous efficiency	100-130LM/W
Power factor	>0.9
Working voltage	DC24V/AC85-265V
Frequency range	50-60Hz
Drive Electrical	Mean well/Doen
Control mode	ON-OFF/DMX512/DALI
Working temperature	-40~+50°C
Safety level	I-III
Lamp material	6063 aluminum + 304 stainless steel
IP Grade	IP65



产品尺寸 Product Size:

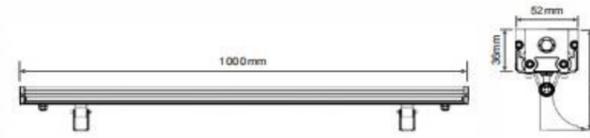


QT14009

Product model	QT14009
Product power	18W/24W36W-36/48W
Luminous color	SINGLE CCT-RGB/RGBW
LED Qty	18/24/36PCS
Lamp Size	L1000*W52*H36MM
LED Light Source	OSRAM/CREE
Light Angle	5°/10°/15°/30°/45°/60°/15*45°/10*60°
CRI	Ra 80
Luminous efficiency	100-130LM/W
Power factor	>0.9
Working voltage	DC24V/AC85-265V
Frequency range	50-60Hz
Drive Electrical	Mean well/Doen
Control mode	ON-OFF/DMX512/DALI
Working temperature	-40~+50°C
Safety level	I-III
Lamp material	6063 aluminum + 304 stainless steel
IP Grade	IP65




产品尺寸 Product Size:

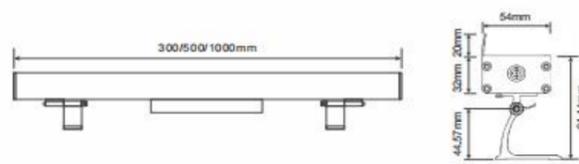

QT14010

Product model	QT14010
Product power	48W/60W-80W
Luminous color	SINGLE CCT-RGB/RGBW
LED Qty	24PCS
Lamp Size	L1000*W54*H32MM
LED Light Source	OSRAM/CREE
Light Angle	5°/10°/15°/30°/45°/60°/15*45°/10*60°
CRI	Ra 80
Luminous efficiency	100-130LM/W
Power factor	>0.9
Working voltage	DC24V/AC85-265V
Frequency range	50-60Hz
Drive Electrical	Mean well/Doen
Control mode	ON-OFF/DMX512/DALI
Working temperature	-40~+50°C
Safety level	I-III
Lamp material	6063 aluminum + 304 stainless steel
IP Grade	IP65

产品尺寸 Product Size:

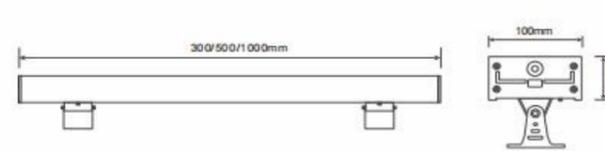

QT14011

Product model	QT14011
Product power	108W-108/144W
Luminous color	SINGLE CCT-RGB/RGBW
LED Qty	108/72PCS
Lamp Size	L1000*W100*H50MM
LED Light Source	OSRAM/CREE
Light Angle	5°/10°/15°/30°/45°/60°/15*45°/10*60°
CRI	Ra 80
Luminous efficiency	100-130LM/W
Power factor	>0.9
Working voltage	DC24V/AC85-265V
Frequency range	50-60Hz
Drive Electrical	Mean well/Doen
Control mode	ON-OFF/DMX512/DALI
Working temperature	-40~+50°C
Safety level	I-III
Lamp material	6063 aluminum + 304 stainless steel
IP Grade	IP65



产品尺寸 Product Size:




QT14012

Product model	QT14012
Product power	12W/15W
Luminous color	SINGLE CCT-RGB/RGBW
LED Qty	48PCS
Lamp Size	L1000*W27*H27MM
LED Light Source	OSRAM/CREE
Light Angle	30°/60°/120°/15*45°/10*60°
CRI	Ra 80
Luminous efficiency	100-130LM/W
Power factor	>0.9
Working voltage	DC24V
Frequency range	50-60Hz
Drive Electrical	Mean well/Doen
Control mode	ON-OFF/DMX512/DALI
Working temperature	-40~+50°C
Safety level	I-III
Lamp material	6063 aluminum + 304 stainless steel
IP Grade	IP65



产品尺寸 Product Size:




QT14013

Product model	QT14013
Product power	12W/15W
Luminous color	SINGLE CCT-RGB/RGBW
LED Qty	48PCS
Lamp Size	L1000*W45*H27MM
LED Light Source	OSRAM/CREE
Light Angle	30°/60°/120°/15*45°/10*60°
CRI	Ra 80
Luminous efficiency	100-130LM/W
Power factor	>0.9
Working voltage	DC24V
Frequency range	50-60Hz
Drive Electrical	Mean well/Doen
Control mode	ON-OFF/DMX512/DALI
Working temperature	-40~+50°C
Safety level	I-III
Lamp material	6063 aluminum + 304 stainless steel
IP Grade	IP65



产品尺寸 Product Size:

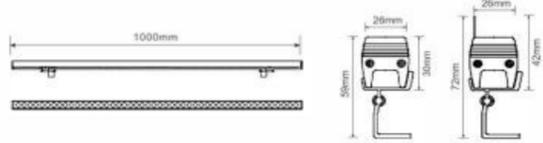


QT14014

Product model	QT14014
Product power	12W/15W
Luminous color	SINGLE CCT-RGB/RGBW
LED Qty	48PCS
Lamp Size	L1000*W26*H30MM
LED Light Source	OSRAM/CREE
Light Angle	30°/60°/120°/15*45°/10*60°
CRI	Ra 80
Luminous efficiency	100-130LM/W
Power factor	>0.9
Working voltage	DC24V
Frequency range	50-60Hz
Drive Electrical	Mean well/Doen
Control mode	ON-OFF/DMX512/DALI
Working temperature	-40~+50°C
Safety level	I-III
Lamp material	6063 aluminum + 304 stainless steel
IP Grade	IP65



产品尺寸 Product Size:

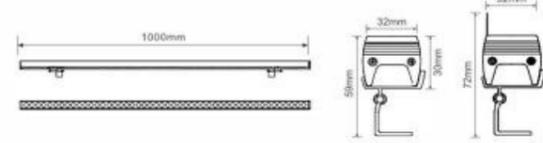


QT14015


Product model	QT14015
Product power	12W/15W
Luminous color	SINGLE CCT-RGB/RGBW
LED Qty	48PCS
Lamp Size	L1000*W32*H30MM
LED Light Source	OSRAM/CREE
Light Angle	30°/60°/120°/15*45°/10*60°
CRI	Ra 80
Luminous efficiency	100-130LM/W
Power factor	>0.9
Working voltage	DC24V
Frequency range	50-60Hz
Drive Electrical	Mean well/Doen
Control mode	ON-OFF/DMX512/DALI
Working temperature	-40~+50°C
Safety level	I-III
Lamp material	6063 aluminum + 304 stainless steel
IP Grade	IP65



产品尺寸 Product Size:



产品尺寸 Product Size:

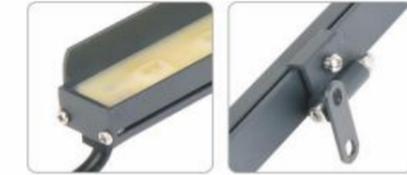

QT14016


Product model	QT14016
Product power	12W/15W
Luminous color	SINGLE CCT-RGB/RGBW
LED Qty	48PCS
Lamp Size	L1000*W28*H36MM
LED Light Source	OSRAM/CREE
Light Angle	30°/60°/120°/15°*45°/10°*60°
CRI	Ra 80
Luminous efficiency	100-130LM/W
Power factor	>0.9
Working voltage	DC24V
Frequency range	50-60Hz
Drive Electrical	Mean well/Doen
Control mode	ON-OFF/DMX512/DALI
Working temperature	-40~+50°C
Safety level	I-III
Lamp material	6063 aluminum + 304 stainless steel
IP Grade	IP65

QT14017

Product model	QT14017
Product power	12W
Luminous color	SINGLE CCT-RGB/RGBW
LED Qty	48PCS
Lamp Size	L1000*W18*H12MM
LED Light Source	OSRAM/CREE
Light Angle	120°
CRI	Ra 80
Luminous efficiency	100-130LM/W
Power factor	>0.9
Working voltage	DC24V
Frequency range	50-60Hz
Drive Electrical	Mean well/Doen
Control mode	ON-OFF/DMX512/DALI
Working temperature	-40~+50°C
Safety level	I-III
Lamp material	6063 aluminum + 304 stainless steel
IP Grade	IP65



产品尺寸 Product Size:

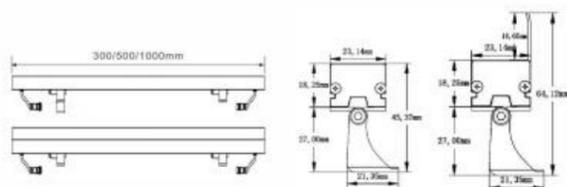


QT14018

Product model	QT14018
Product power	12W/15W
Luminous color	SINGLE CCT-RGB/RGBW
LED Qty	48PCS
Lamp Size	L1000*W23*H18MM
LED Light Source	OSRAM/CREE
Light Angle	30°/60°/120°/15*45°/10*60°
CRI	Ra 80
Luminous efficiency	100-130LM/W
Power factor	>0.9
Working voltage	DC24V
Frequency range	50-60Hz
Drive Electrical	Mean well/Doen
Control mode	ON-OFF/DMX512/DALI
Working temperature	-40~+50°C
Safety level	I-III
Lamp material	6063 aluminum + 304 stainless steel
IP Grade	IP65



产品尺寸 Product Size:

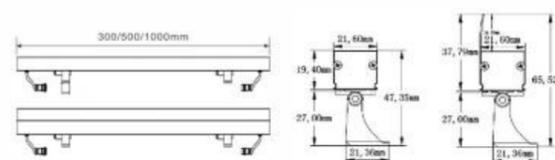


QT14019

Product model	QT14019
Product power	12W/15W
Luminous color	SINGLE CCT-RGB/RGBW
LED Qty	48PCS
Lamp Size	L1000*W18*H12MM
LED Light Source	OSRAM/CREE
Light Angle	30°/60°/120°/15*45°/10*60°
CRI	Ra 80
Luminous efficiency	100-130LM/W
Power factor	>0.9
Working voltage	DC24V
Frequency range	50-60Hz
Drive Electrical	Mean well/Doen
Control mode	ON-OFF/DMX512/DALI
Working temperature	-40~+50°C
Safety level	I-III
Lamp material	6063 aluminum + 304 stainless steel
IP Grade	IP65



产品尺寸 Product Size:

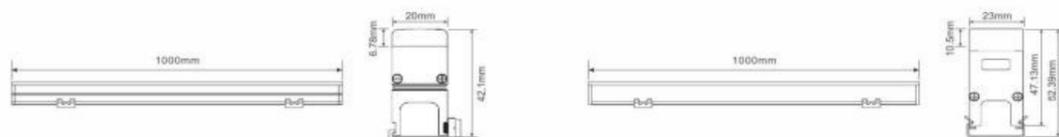


QT14020

QT14021

Product model	QT14020	QT14021
Product power	12W/15W	12/15W
Luminous color	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW
LED Qty	48PCS	48PCS
Lamp Size	L1000*W20*H42MM	L1000*W23*H47MM
LED Light Source	OSRAM/CREE	
Light Angle	120°	
CRI	Ra 80	
Luminous efficiency	100-130LM/W	
Power factor	>0.9	
Working voltage	DC24V	
Frequency range	50-60Hz	
Drive Electrical	Mean well/Doen	
Control mode	ON-OFF/DMX512/DALI	
Working temperature	-40~+50°C	
Safety level	I-III	
Lamp material	6063 aluminum + 304 stainless steel	
IP Grade	IP65	



产品尺寸 Product Size:

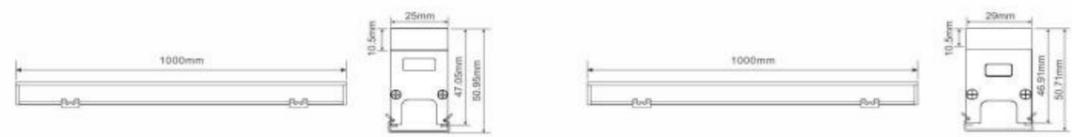

QT14022


QT14023

Product model	QT14022	QT14023
Product power	12W/15W	12/15W
Luminous color	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW
LED Qty	48PCS	48PCS
Lamp Size	L1000*W25*H47MM	L1000*W29*H50MM
LED Light Source	OSRAM/CREE	
Light Angle	120°	
CRI	Ra 80	
Luminous efficiency	100-130LM/W	
Power factor	>0.9	
Working voltage	DC24V	
Frequency range	50-60Hz	
Drive Electrical	Mean well/Doen	
Control mode	ON-OFF/DMX512/DALI	
Working temperature	-40~+50°C	
Safety level	I-III	
Lamp material	6063 aluminum + 304 stainless steel	
IP Grade	IP65	






产品尺寸 Product Size:

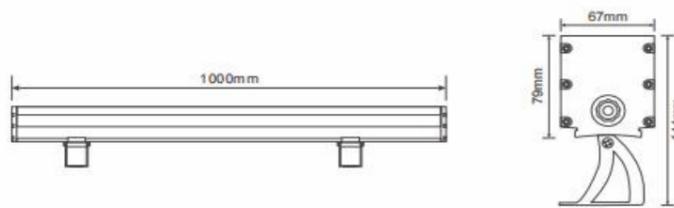


QT14024





Product model	QT14024
Product power	60-80W
Luminous color	SINGLE CCT-RGB/RGBW
LED Qty	2PCS
Lamp Size	L1000*W67*H79MM
LED Light Source	OSRAM/CREE
Light Angle	/
CRI	Ra 80
Luminous efficiency	100-130LM/W
Power factor	>0.9
Working voltage	DC24V/AC85-265V
Frequency range	50-60Hz
Drive Electrical	Mean well/Doen
Control mode	ON-OFF/DMX512/DALI
Working temperature	-40~+50°C
Safety level	I-III
Lamp material	6063 aluminum + 304 stainless steel
IP Grade	IP65

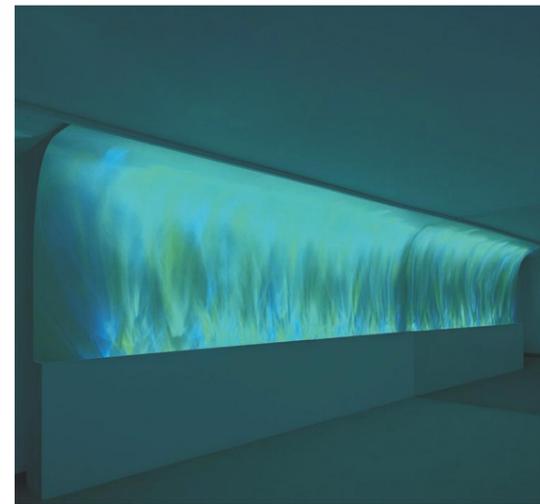


TREE HUGGING LIGHT / HOLDING POST LIGHT

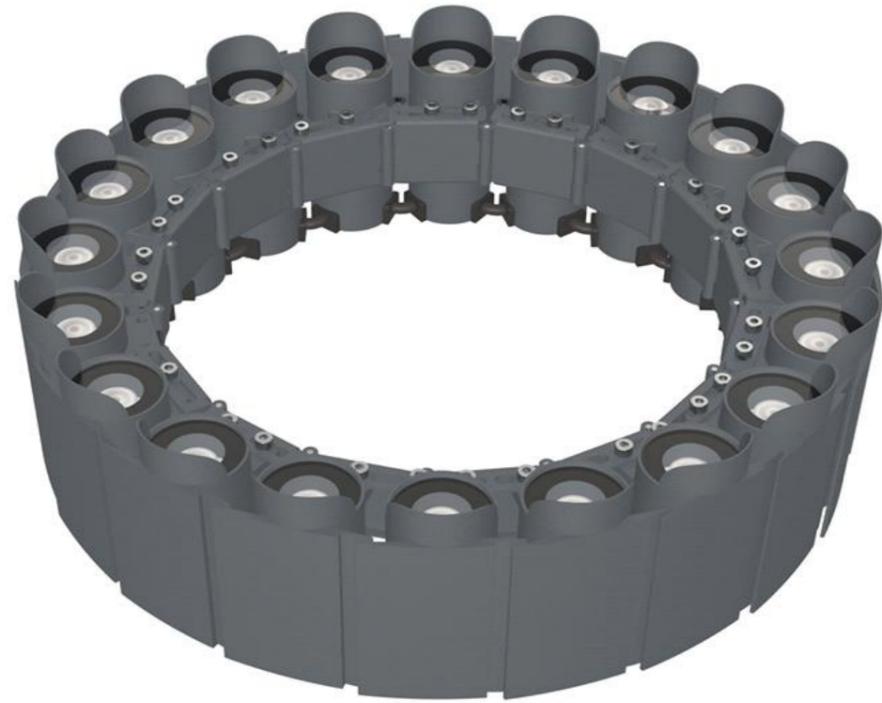

QT15001

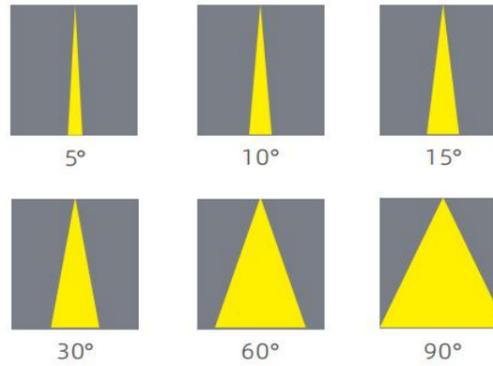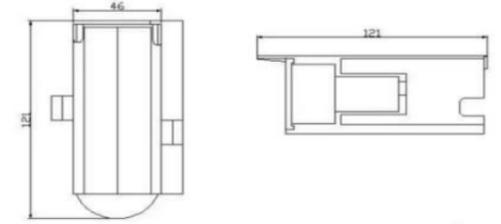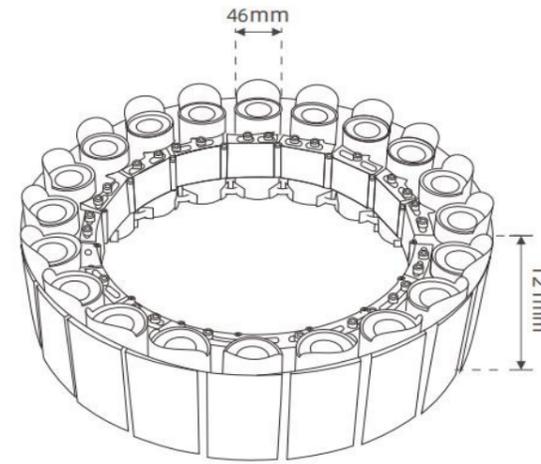

蜂窝网
Cellular mesh



遮光罩
Cover



地插
Spike





Product model	QT15001
Product power	3-6W
Luminous color	SINGLE CCT-RGB/RGBW
LED Qty	1PCS
Lamp Size	D46*H21MM
LED Light Source	OSRAM/CREE
Light Angle	5°/10°/15°/30°/45°/60°/10*30°/10*60°
CRI	Ra 80
Luminous efficiency	100-130LM/W
Power factor	>0.9
Working voltage	DC24V/AC85-265V
Frequency range	50-60Hz
Drive Electrical	Mean well/Doen
Control mode	ON-OFF/DMX512/DALI
Working temperature	-40~+50°C
Safety level	I-III
Lamp material	Die-casting aluminum
IP Grade	IP65


TREE HUGGING LIGHT / HOLDING POST LIGHT



QT15002




QT15003

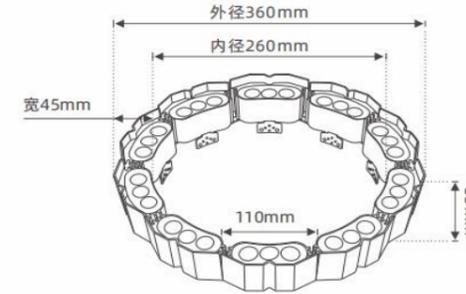

Product model	QT15002
Product power	1/2W*18
Luminous color	SINGLE CCT-RGB/RGBW
LED Qty	18PCS
Lamp Size	D550*H270MM
LED Light Source	OSRAM/CREE
Light Angle	5°/10°/15°/30°/60°/90°
CRI	Ra 80
Luminous efficiency	100-130LM/W
Power factor	>0.9
Working voltage	DC24V
Frequency range	50-60Hz
Drive Electrical	Mean well/Doen
Control mode	ON-OFF/DMX512/DALI
Working temperature	-40~+50°C
Safety level	I-III
Lamp material	ADC12 Die-casting aluminum
IP Grade	IP65


Product model	QT15003
Product power	3W*10
Luminous color	SINGLE-RGB/RGBW
LED Qty	30PCS
Lamp Size	D360*H85MM
LED Light Source	OSRAM/CREE
Light Angle	5°/10°/15°/30°/60°/90°
CRI	Ra 80
Luminous efficiency	100-130LM/W
Power factor	>0.9
Working voltage	DC24V
Frequency range	50-60Hz
Drive Electrical	Mean well/Doen
Control mode	ON-OFF/DMX512/DALI
Working temperature	-40~+50°C
Safety level	I-III
Lamp material	ADC12 Die-casting aluminum
IP Grade	IP65

TREE HUGGING LIGHT / HOLDING POST LIGHT

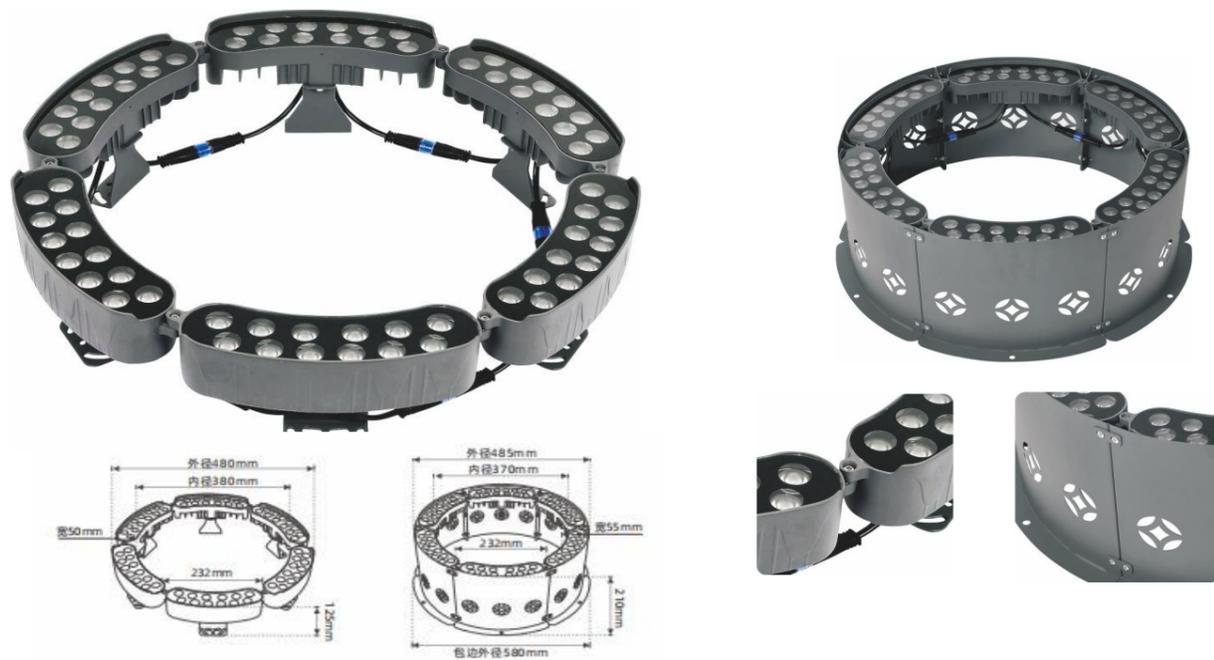

QT15004


Product model	QT15004
Product power	12W*6
Luminous color	SINGLE-RGB/RGBW
LED Qty	12PCS*6
Lamp Size	D480*H125MM
LED Light Source	OSRAM/CREE
Light Angle	5°/10°/15°/30°/60°/90°
CRI	Ra 80
Luminous efficiency	100-130LM/W
Power factor	>0.9
Working voltage	DC24V
Frequency range	50-60Hz
Drive Electrical	Mean well/Doen
Control mode	ON-OFF/DMX512/DALI
Working temperature	-40~+50°C
Safety level	I-III
Lamp material	ADC12 Die-casting aluminum
IP Grade	IP65

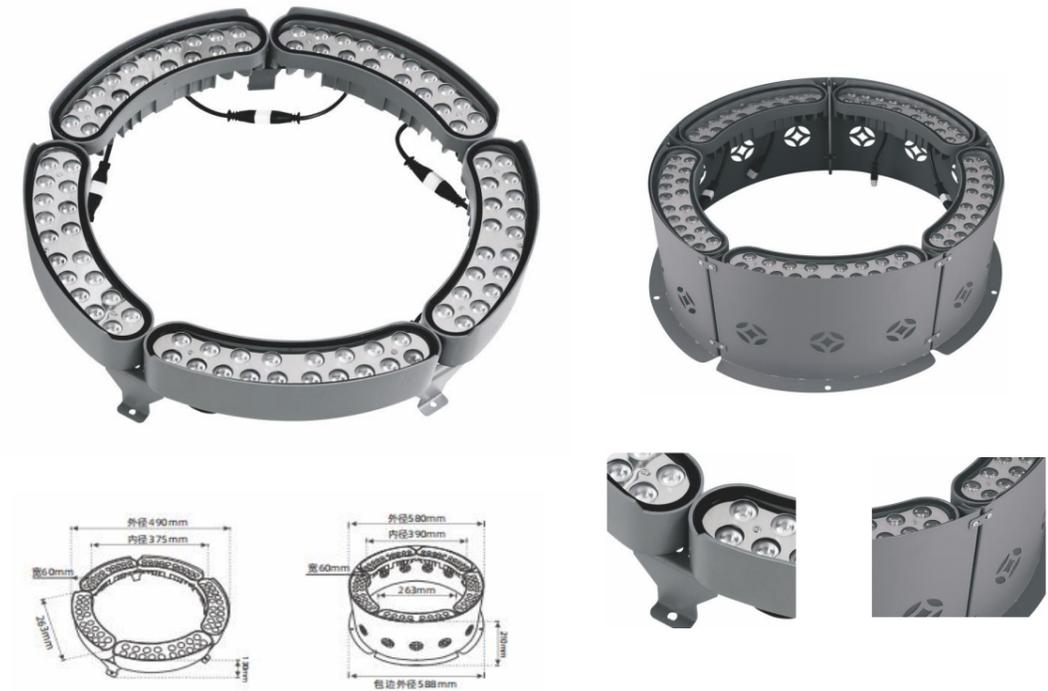

QT15005

Product model	QT15005
Product power	24W*5
Luminous color	SINGLE-RGB/RGBW
LED Qty	24PCS*5
Lamp Size	D490*H130MM
LED Light Source	OSRAM/CREE
Light Angle	5°/10°/15°/30°/60°/90°
CRI	Ra 80
Luminous efficiency	100-130LM/W
Power factor	>0.9
Working voltage	DC24V
Frequency range	50-60Hz
Drive Electrical	Mean well/Doen
Control mode	ON-OFF/DMX512/DALI
Working temperature	-40~+50°C
Safety level	I-III
Lamp material	ADC12 Die-casting aluminum
IP Grade	IP65

TREE HUGGING LIGHT / HOLDING POST LIGHT

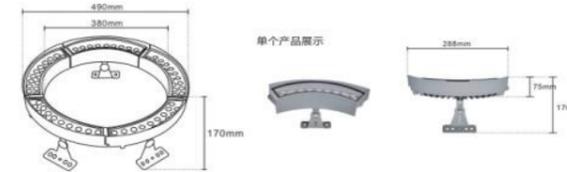

QT15006

Product model	QT15006
Product power	12W*4
Luminous color	SINGLE-RGB/RGBW
LED Qty	12PCS*4
Lamp Size	D325*H52MM
LED Light Source	OSRAM/CREE
Light Angle	5°/10°/15°/30°/60°/90°
CRI	Ra 80
Luminous efficiency	100-130LM/W
Power factor	>0.9
Working voltage	DC24V
Frequency range	50-60Hz
Drive Electrical	Mean well/Doen
Control mode	ON-OFF/DMX512/DALI
Working temperature	-40~+50°C
Safety level	I-III
Lamp material	ADC12 Die-casting aluminum
IP Grade	IP65




QT15007

Product model	QT15007
Product power	18W*5
Luminous color	SINGLE-RGB/RGBW
LED Qty	18PCS*5
Lamp Size	D490*H170MM
LED Light Source	OSRAM/CREE
Light Angle	5°/10°/15°/30°/60°/90°
CRI	Ra 80
Luminous efficiency	100-130LM/W
Power factor	>0.9
Working voltage	DC24V
Frequency range	50-60Hz
Drive Electrical	Mean well/Doen
Control mode	ON-OFF/DMX512/DALI
Working temperature	-40~+50°C
Safety level	I-III
Lamp material	ADC12 Die-casting aluminum
IP Grade	IP65

TRESTLE LIGHT SERIES




QT16001/02/03



Product model	QT16001	QT16002	QT16003
Product power	2W-5W	3W-6W	4W-10W
Luminous color	SINGLE-RGB/RGBW	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW
LED Qty	2PCS	3PCS	4PCS
Lamp Size	D100*H135MM	D120*H135MM	D150*H135MM
LED Light Source	OSRAM/CREE		
Light Angle	5°/10°/15°/30°/45°/60°/90°		
CRI	Ra 80		
Luminous efficiency	100-130LM/W		
Power factor	>0.9		
Working voltage	DC24V/AC220V		
Frequency range	50-60Hz		
Drive Electrical	Mean well/Doen		
Control mode	ON-OFF/DMX512/DALI		
Working temperature	-40~+50°C		
Safety level	I-III		
Lamp material	ADC12 Die-casting aluminum		
IP Grade	IP65		






WINDOWSILL LIGHTING

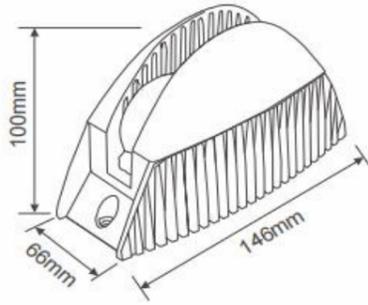

QT16004





Product model	QT16004
Product power	12W-18W
Luminous color	SINGLE-RGB/RGBW
LED Qty	6PCS
Lamp Size	L146*W66*H100MM
LED Light Source	OSRAM/CREE
Light Angle	3*180°
CRI	Ra 80
Luminous efficiency	100LM/W
Power factor	>0.9
Working voltage	DC24V/AC220V
Frequency range	50-60Hz
Drive Electrical	Mean well/Doen
Control mode	ON-OFF/DMX512/DALI
Working temperature	-40~+50°C
Safety level	I-III
Lamp material	ADC12 Die-casting aluminum
IP Grade	IP65

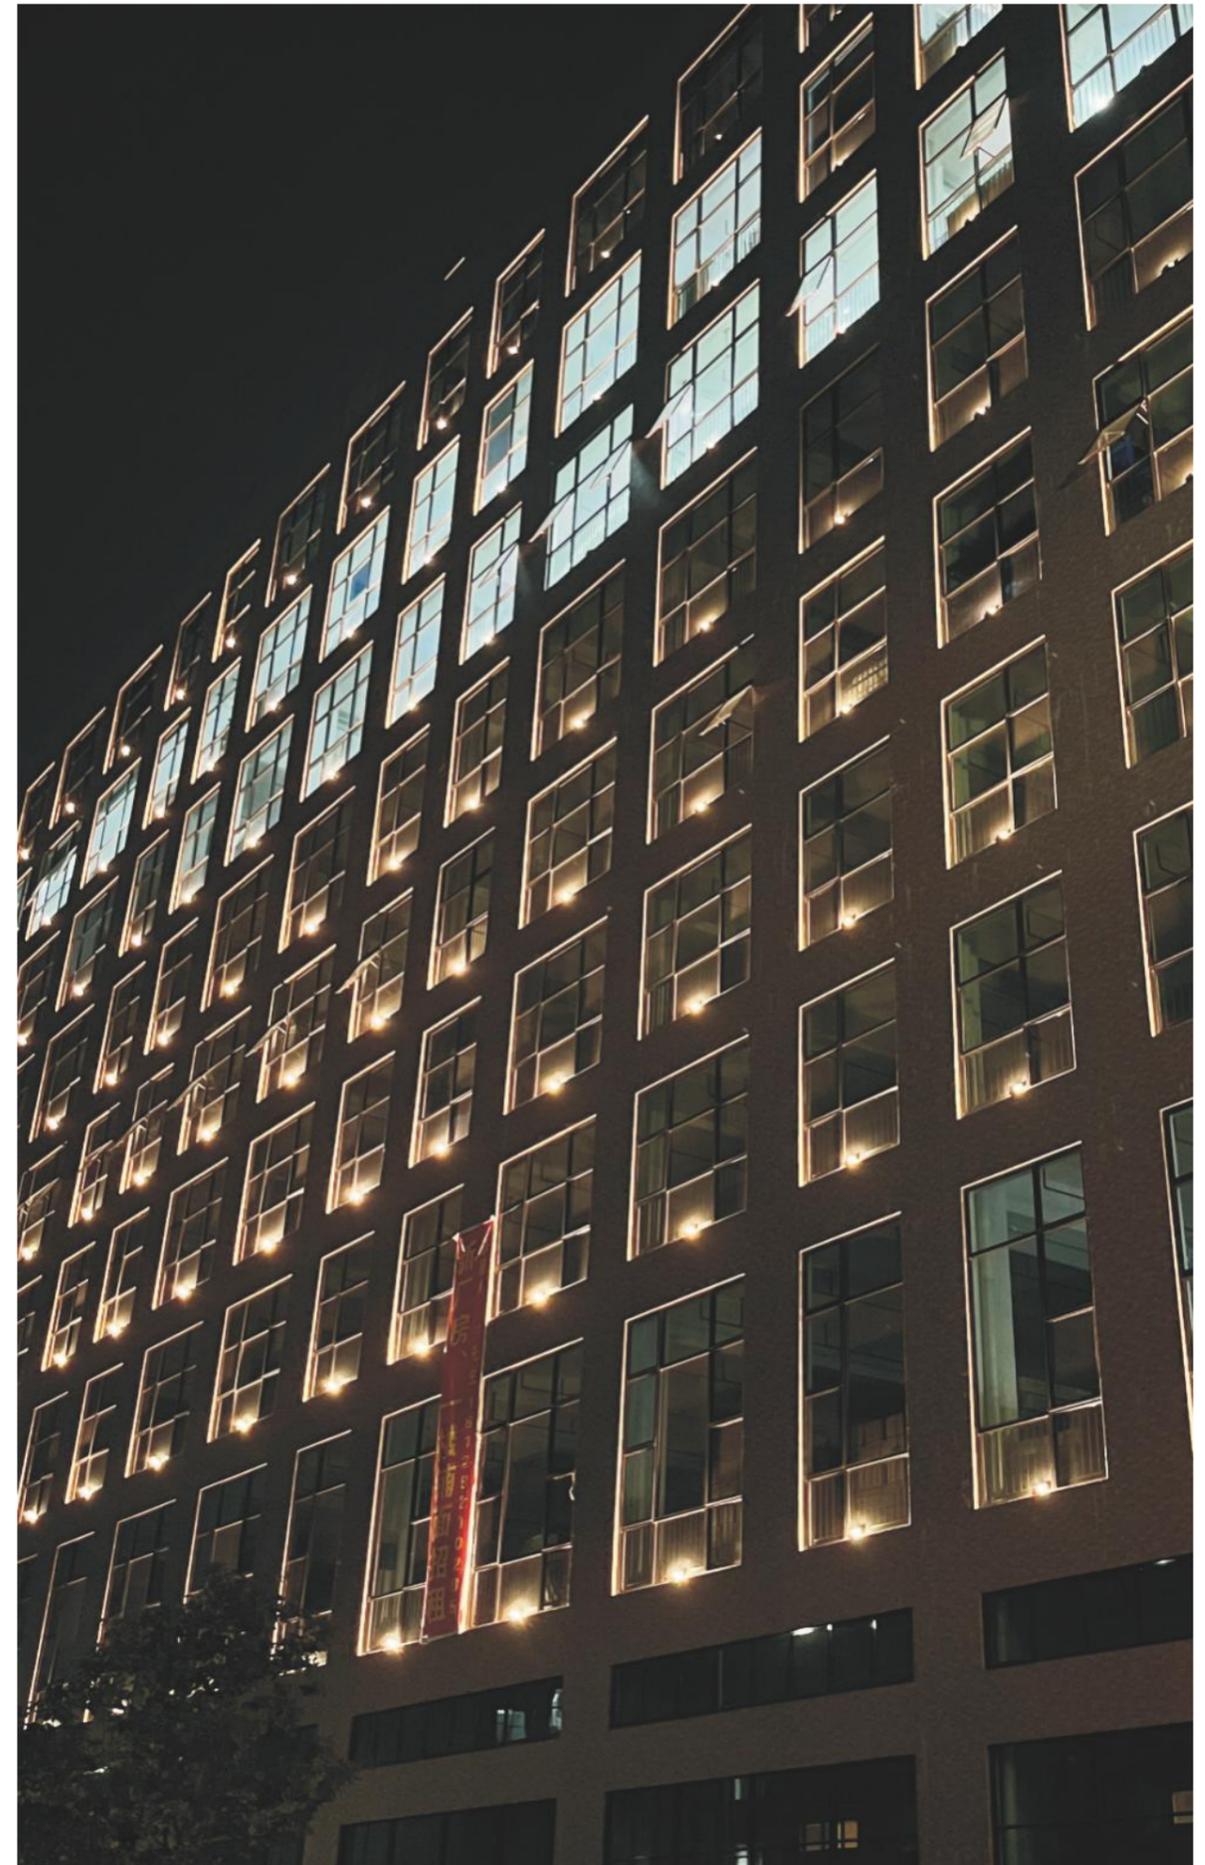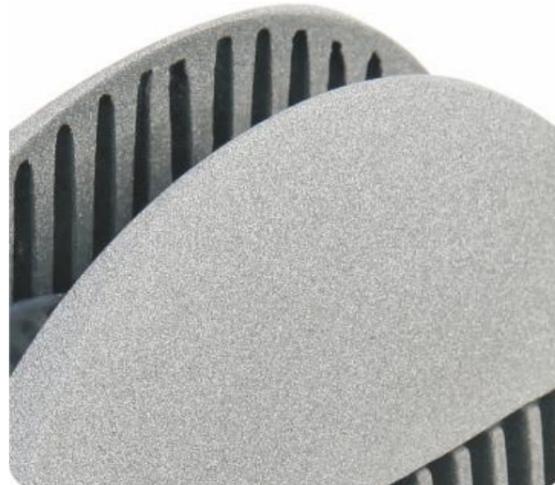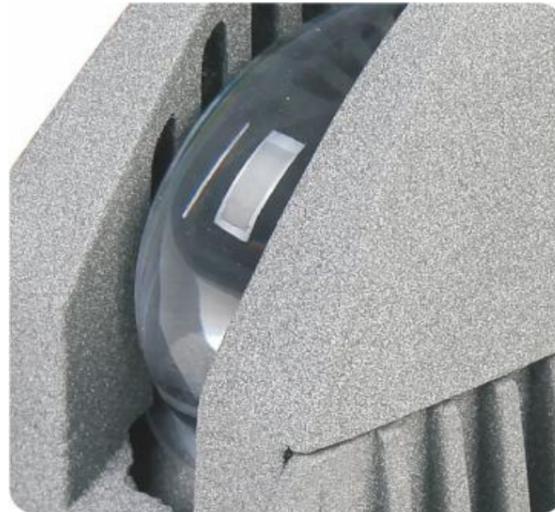

WINDOWSILL LIGHTING



QT16005/06

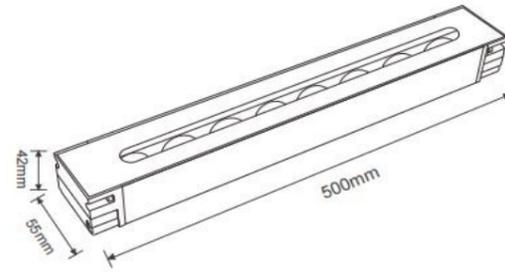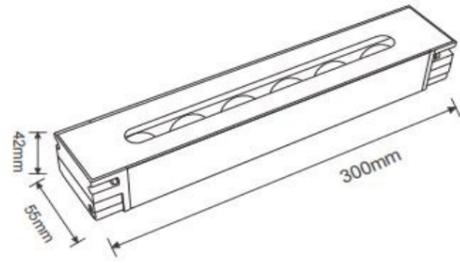




Product model	QT16005	QT16006
Product power	6/8W-12W	12/18W-18W/24W
Luminous color	SINGLE-RGB/RGBW	SINGLE CCT-RGB/RGBW
LED Qty	4PCS	8PCS
Lamp Size	L300*55*H42MM	L500*55*H42MM
LED Light Source	OSRAM/CREE	
Light Angle	5*180°	
CRI	Ra 80	
Luminous efficiency	100LM/W	
Power factor	>0.9	
Working voltage	DC24V	
Frequency range	50-60Hz	
Drive Electrical	Mean well/Doen	
Control mode	ON-OFF/DMX512/DALI	
Working temperature	-40~+50°C	
Safety level	I-III	
Lamp material	ADC12 Die-casting aluminum	
IP Grade	IP65	



POINT SOURCE LIGHT



QT16007/08/09







Product model	QT16007	QT16008	QT16009
Product power	3W-5W	6W-8W	6W-8W
Luminous color	SINGLE-RGB/RGBW	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW
LED Qty	3PCS	6PCS	6PCS
Lamp Size	D85*H67MM	D100*H58MM	D112*H68MM
LED Light Source	OSRAM/CREE		
Light Angle	120°		
CRI	Ra 80		
Luminous efficiency	100LM/W		
Power factor	>0.9		
Working voltage	DC24V		
Frequency range	50-60Hz		
Drive Electrical	Mean well/Doen		
Control mode	ON-OFF/DMX512/DALI		
Working temperature	-40~+50°C		
Safety level	I-III		
Lamp material	ADC12 Die-casting aluminum		
IP Grade	IP65		




POINT SOURCE LIGHT



QT16010/11/12/13




Product model	QT16010	QT16011	QT16012	QT16013
Product power	1.44W	1.44W	0.72W	1.44W
Luminous color	SINGLE-RGB/RGBW	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW
LED Qty	4PCS	6PCS	3PCS	6PCS
Lamp Size	L33*W38*H15MM	L40*W50*H15MM	D35*H15MM	D45*H15MM
LED Light Source	OSRAM/CREE			
Light Angle	120°			
CRI	Ra 80			
Luminous efficiency	100LM/W			
Power factor	>0.9			
Working voltage	DC24V			
Frequency range	50-60Hz			
Drive Electrical	Mean well/Doen			
Control mode	ON-OFF/DMX512/DALI			
Working temperature	-40~+50°C			
Safety level	I-III			
Lamp material	PVC+PC COVER			
IP Grade	IP65			

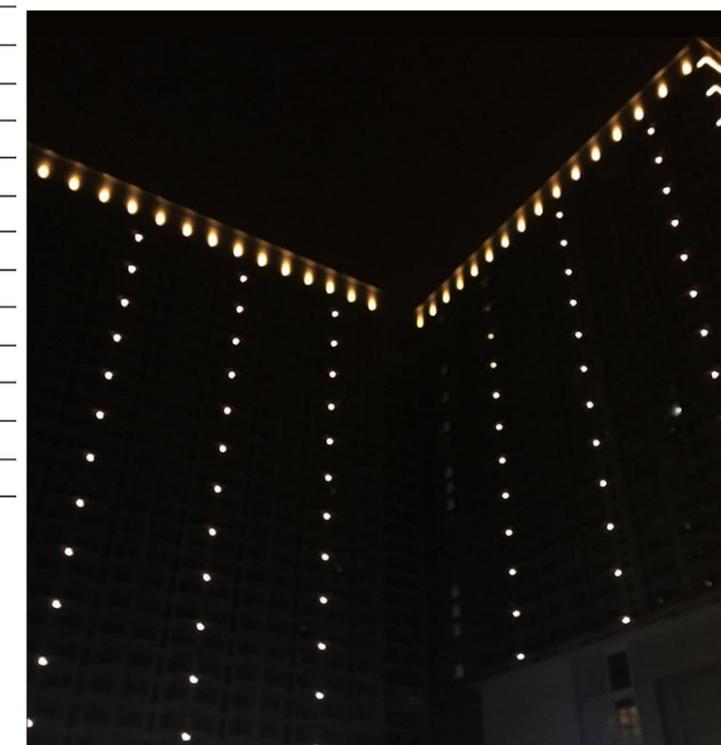

UNDERWATER LIGHT



QT17001


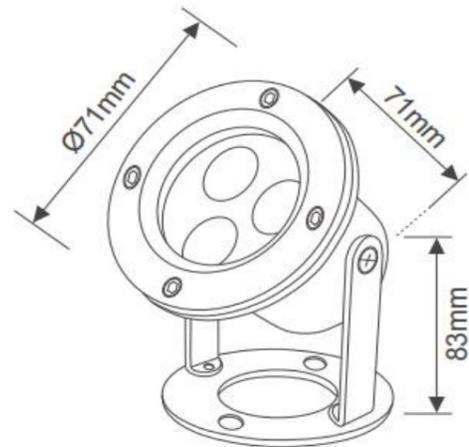


Product model	QT17001
Product power	3W-6W
Luminous color	SINGLE-RGB/RGBW
LED Qty	3PCS
Lamp Size	D71*H83MM
LED Light Source	OSRAM/CREE
Light Angle	5°/10°/15°/30°/60°/90°/
CRI	Ra 80
Luminous efficiency	100-130LM/W
Power factor	>0.9
Working voltage	DC24V
Frequency range	50-60Hz
Drive Electrical	Mean well/Doen
Control mode	ON-OFF/DMX512/DALI
Working temperature	-40~+50°C
Safety level	I-III
Lamp material	304 STAINLESS STEEL
IP Grade	IP65


UNDERWATER LIGHT




QT17002/03

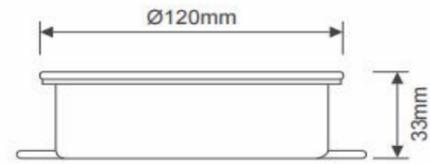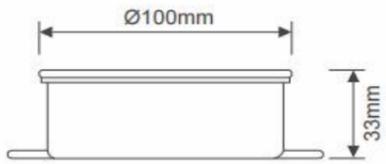




Product model	QT17002	QT17003
Product power	6W	9W
Luminous color	SINGLE-RGB/RGBW	SINGLE CCT-RGB/RGBW
LED Qty	6PCS	9PCS
Lamp Size	D100*H33MM	D120*H33MM
LED Light Source	OSRAM/CREE	
Light Angle	5°/10°/15°/30°/60°/90°/	
CRI	Ra 80	
Luminous efficiency	100-130LM/W	
Power factor	>0.9	
Working voltage	DC24V/24V	
Frequency range	50-60Hz	
Drive Electrical	Mean well/Doen	
Control mode	ON-OFF/DMX512/DALI	
Working temperature	-40~+50°C	
Safety level	I-III	
Lamp material	304 STAINLESS STEEL	
IP Grade	IP65	

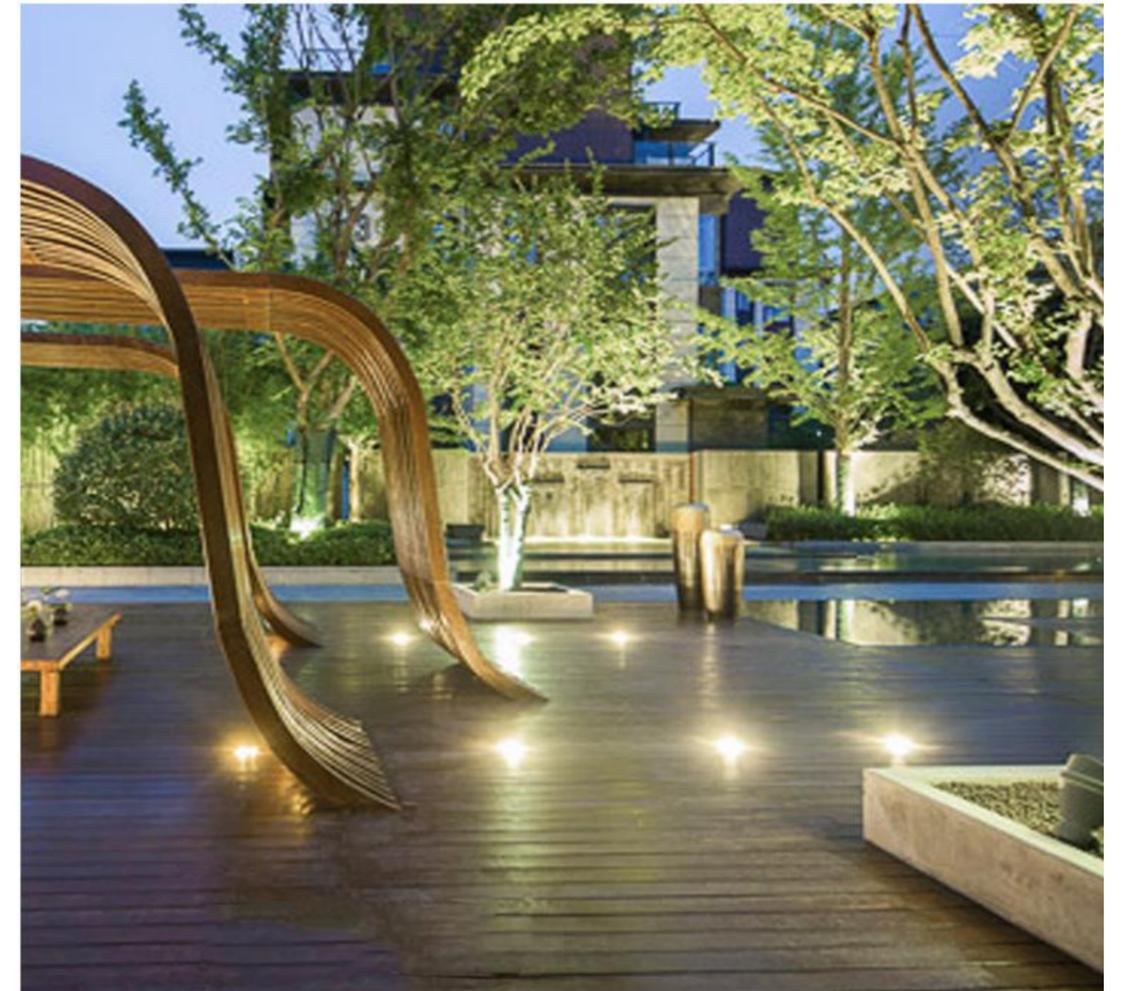


UNDERWATER LIGHT

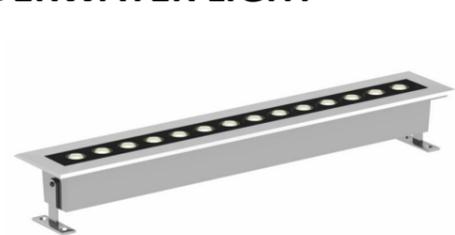

QT17004/05

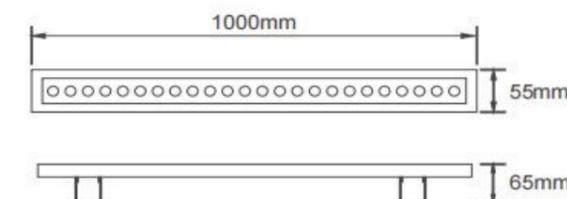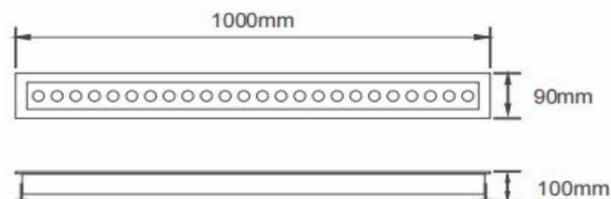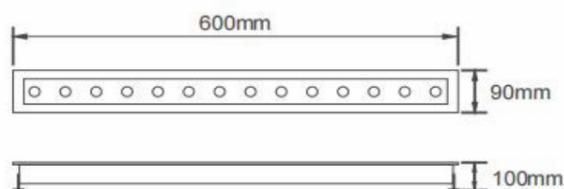




Product model	QT17004	QT17005
Product power	18W-24W	18/24/36W-36/48W
Luminous color	SINGLE-RGB/RGBW	SINGLE CCT-RGB/RGBW
LED Qty	12/24/36PCS	18/24/36PCS
Lamp Size	L600*W90*H100MM	L1000*W90*H100MM
LED Light Source	OSRAM/CREE	
Light Angle	5°/10°/15°/30°/60°/90°/	
CRI	Ra 80	
Luminous efficiency	100-130LM/W	
Power factor	>0.9	
Working voltage	DC24V/24V	
Frequency range	50-60Hz	
Drive Electrical	Mean well/Doen	
Control mode	ON-OFF/DMX512/DALI	
Working temperature	-40~+50°C	
Safety level	I-III	
Lamp material	304 STAINLESS STEEL	
IP Grade	IP65	

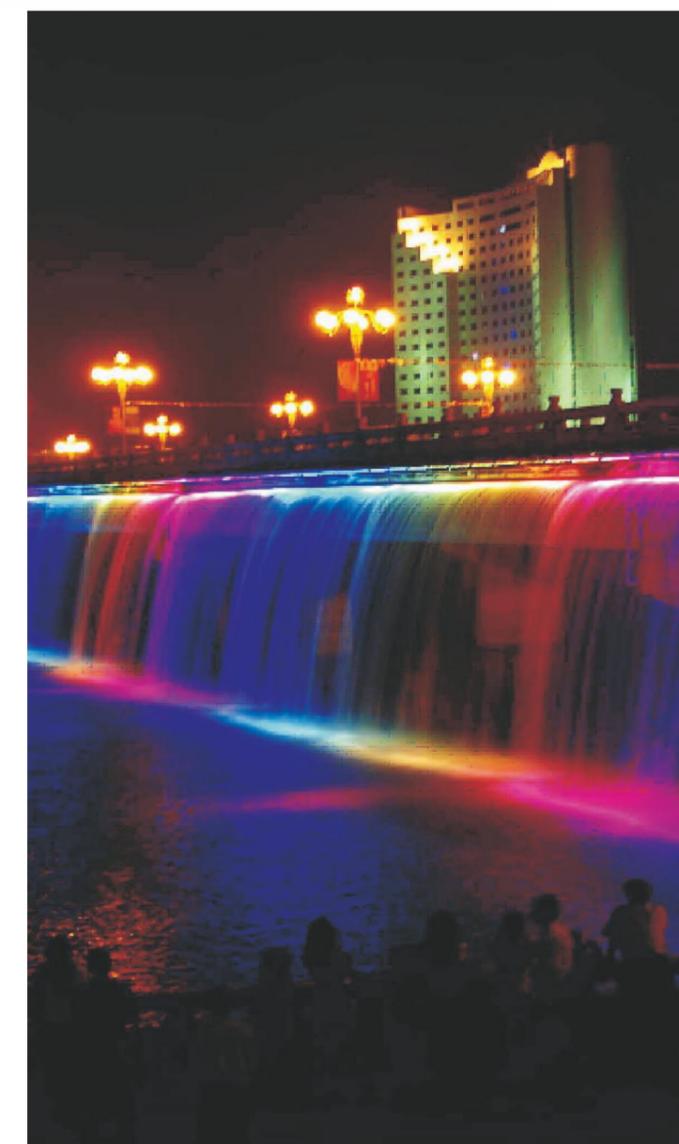


FOUNTAIN LIGHT





QT17006/07/08

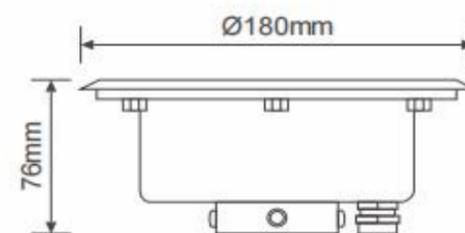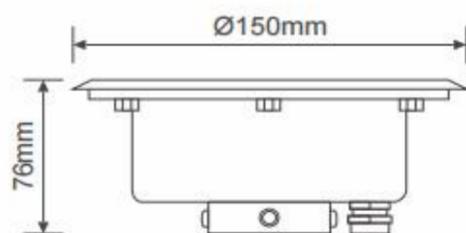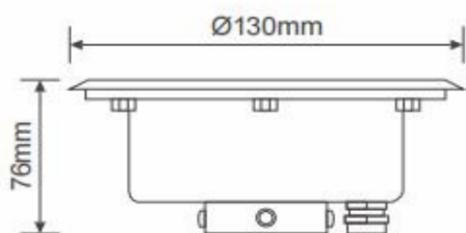


Product model	QT17006	QT17007	QT17008
Product power	6W/9W-12W	6W/9W-12W	12W-18/24W
Luminous color	SINGLE-RGB/RGBW	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW
LED Qty	6/9PCS	6/9PCS	9/12PCS
Lamp Size	D130*H76MM	D150*H76MM	D180*H76MM
LED Light Source	OSRAM/CREE		
Light Angle	5°/10°/15°/30°/60°/90°/		
CRI	Ra 80		
Luminous efficiency	100-130LM/W		
Power factor	>0.9		
Working voltage	DC12V/24V		
Frequency range	50-60Hz		
Drive Electrical	Mean well/Doen		
Control mode	ON-OFF/DMX512/DALI		
Working temperature	-40~+50°C		
Safety level	I-III		
Lamp material	304 STAINLESS STEEL		
IP Grade	IP65		

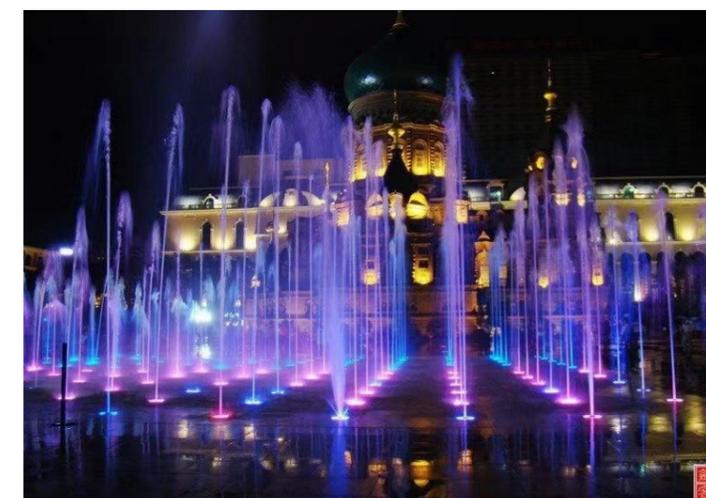

WALL LIGHT

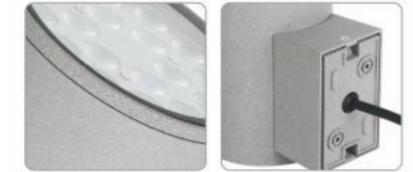

QT18001/02/03/04

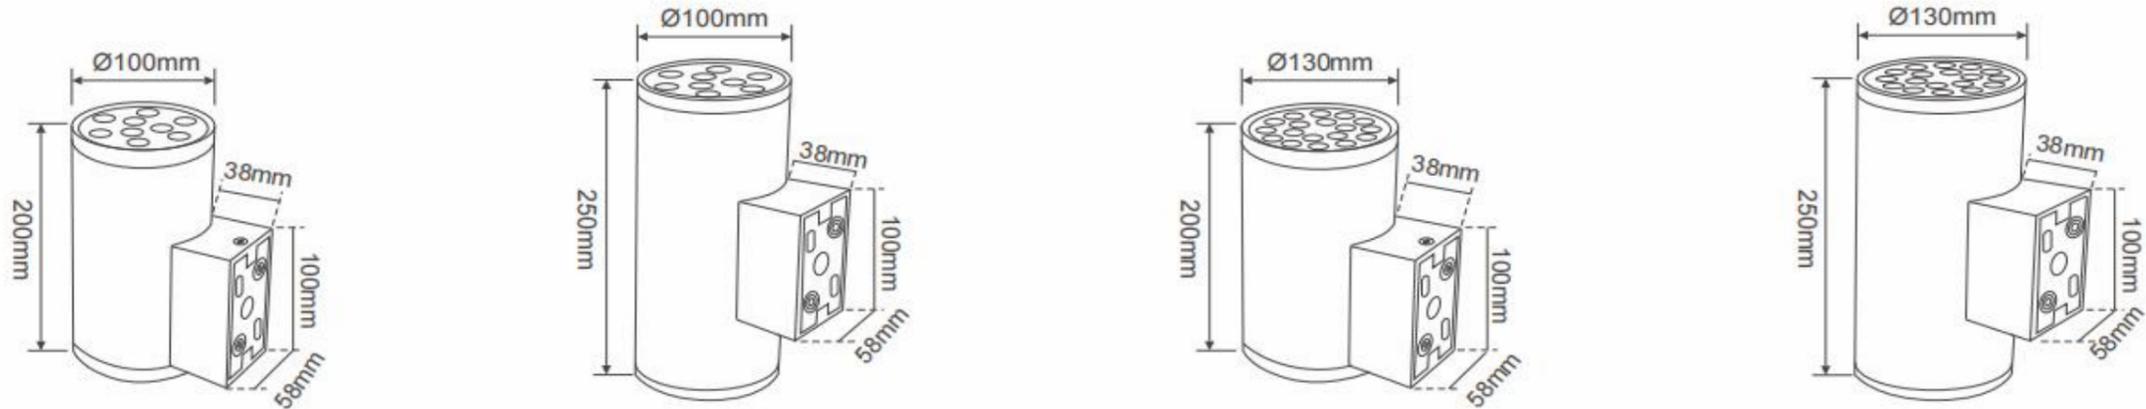

Product model	QT18001	QT18002	QT18003	QT18004
Product power	6W/9W-18W	6W/9W*2-18W*2	12W/18W-24W	12W/18W*2-24W*2
Luminous color	SINGLE-RGB/RGBW	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW
LED Qty	6/9PCS	12/18PCS	12/18PCS	24/36PCS
Lamp Size	D100*H200MM	D100*H250MM	D130*H200MM	D130*H250MM
LED Light Source	OSRAM/CREE			
Light Angle	5°/10°/15°/30°/60°/90°/			
CRI	Ra 80			
Luminous efficiency	100-130LM/W			
Power factor	>0.9			
Working voltage	DC24V/AC220V			
Frequency range	50-60Hz			
Drive Electrical	Mean well/Doen			
Control mode	ON-OFF/DMX512/DALI			
Working temperature	-40~+50°C			
Safety level	I-III			
Lamp material	DC12 Die-casting aluminum			
IP Grade	IP65			

WALL LIGHT






QT18005/06/07/08

Product model	QT18005	QT18006	QT18007	QT18008
Product power	3W*2-6W*2	6W*2-9W*2	9W*2-12W*2	12/18W*2-24W*2
Luminous color	SINGLE-RGB/RGBW	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW
LED Qty	6PCS	12PCS	18PCS	24/36PCS
Lamp Size	D65*H160MM	D90*H255MM	D108*H295MM	D145*H300MM
LED Light Source	OSRAM/CREE			
Light Angle	5°/10°/15°/30°/60°/90°/			
CRI	Ra 80			
Luminous efficiency	100-130LM/W			
Power factor	>0.9			
Working voltage	DC24V/AC220V			
Frequency range	50-60Hz			
Drive Electrical	Mean well/Doen			
Control mode	ON-OFF/DMX512/DALI			
Working temperature	-40~+50°C			
Safety level	I-III			
Lamp material	DC12 Die-casting aluminum			
IP Grade	IP65			

WALL LIGHT



QT18009/10/11

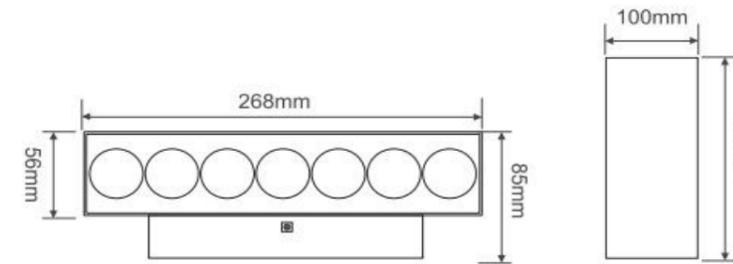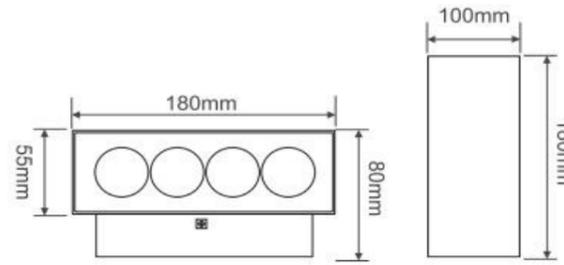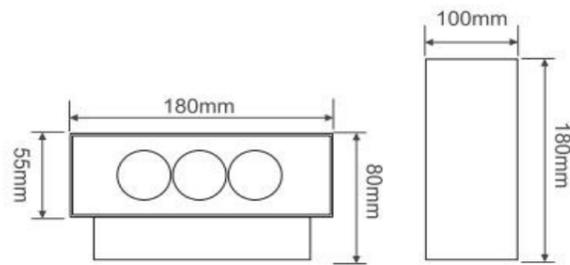


Product model	QT18009	QT18010	QT18011
Product power	6/9W*2-12W*2	12W*2-12W*2	18W*2-24W*2
Luminous color	SINGLE-RGB/RGBW	SINGLE CCT-RGB/RGBW	SINGLE CCT-RGB/RGBW
LED Qty	6/8PCS	8PCS	12PCS
Lamp Size	L180*W55*H100MM	L180*W55*H100MM	L268*W56*H100MM
LED Light Source	OSRAM/CREE		
Light Angle	5°/10°/15°/30°/60°/90°/		
CRI	Ra 80		
Luminous efficiency	100-130LM/W		
Power factor	>0.9		
Working voltage	DC24V/AC220V		
Frequency range	50-60Hz		
Drive Electrical	Mean well/Doen		
Control mode	ON-OFF/DMX512/DALI		
Working temperature	-40~+50°C		
Safety level	I-III		
Lamp material	DC12 Die-casting aluminum		
IP Grade	IP65		

WALL LIGHT



60°

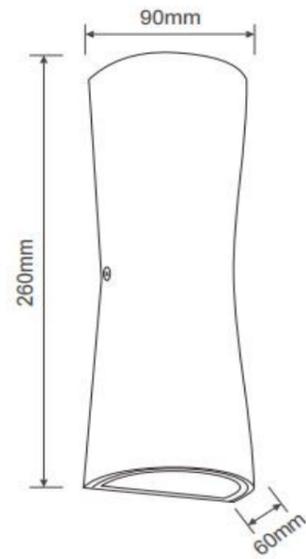

QT18012

Product model	QT18012
Product power	12W
Luminous color	SINGLE-RGB/RGBW
LED Qty	2PCS
Lamp Size	L90*W60*H260MM
LED Light Source	OSRAM/CREE
Light Angle	/60°
CRI	Ra 80
Luminous efficiency	100-130LM/W
Power factor	>0.9
Working voltage	DC24V/AC85-264V
Frequency range	50-60Hz
Drive Electrical	Mean well/Doen
Control mode	ON-OFF/DMX512/DALI
Working temperature	-40~+50°C
Safety level	I-III
Lamp material	DC12 Die-casting aluminum
IP Grade	IP65



WATERPROOF POWER SUPPLY MASTER CONTROLLER



400W WATERPROOF POWER SUPPLY




MAIN CONTROLLER



SUB-CONTROLLER

DMX WIRING DIAGRAM

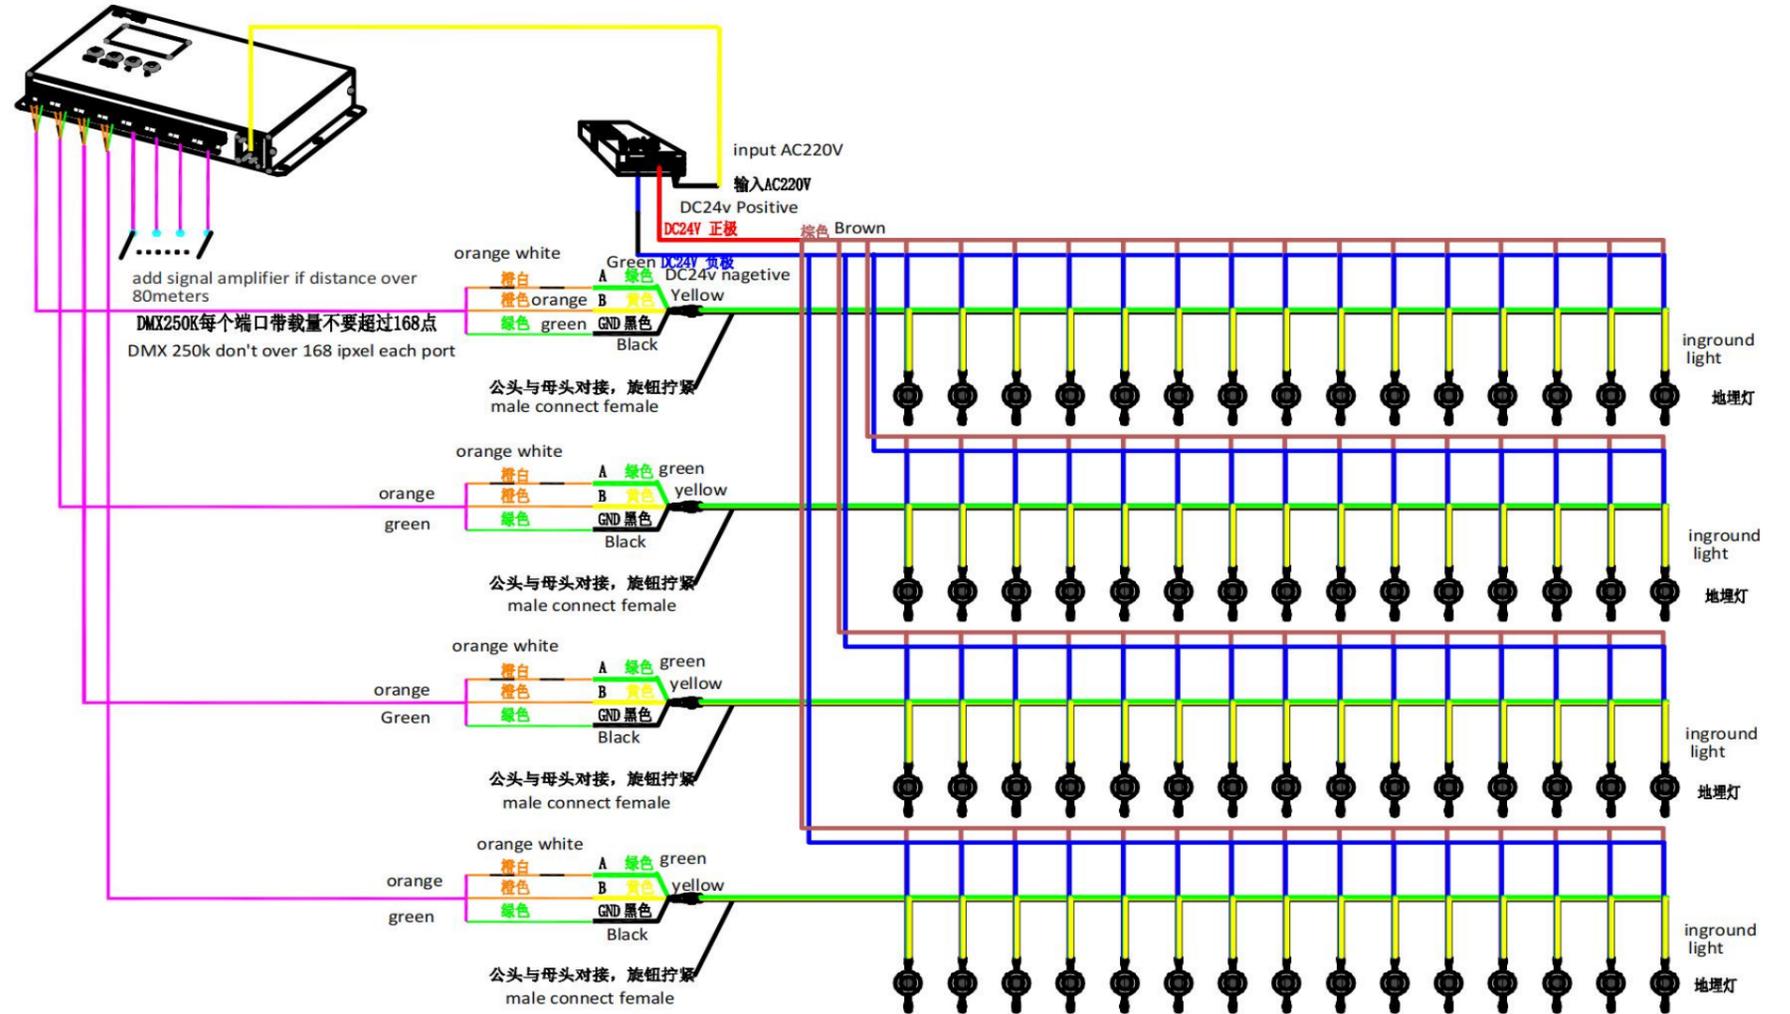

SINGLE COLOR WIRING DIAGRAM

